

Application

Designed for installation on water lines such as service sinks, laundry tubs and hose bibbs to protect against backsiphonage of polluted water into the potable water supply. A breakaway set screw is included to prevent unauthorized removal. Assembly shall provide protection where a potential health hazard does not exist.



Standards Compliance

- ASSE® Listed 1011
- UPC® Listed
- CSA® Certified B64.2

Features

Sizes	3/4"
Maximum working water pressure	125 PSI
Maximum working water temperature	180°F
Hose thread connection	ANSI B1.20.7

Materials

Valve Body	Brass ASTM B16
Elastomers	Buna Nitrile FDA 21 177.2600
Internals	Brass ASTM B16
	300 series Stainless Steel
Polymers	Acetal (Delrin®)

Options (Suffixes can be combined)

With manual drain feature for freeze protection




Accessories

Hose Bibb [195XL](#)




Dimensions & Weights (do not include pkg.)

MODEL	DIMENSIONS (approximate)				WEIGHT	
	A		B			
	in.	mm	in.	mm	lbs.	kg
BFP-8F	115/16	49	15/8	41	0.3	0.1

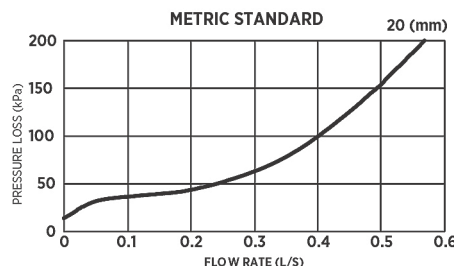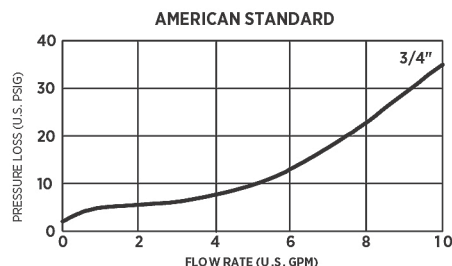

TYPICAL INSTALLATION

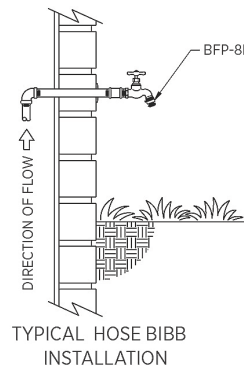

Installation and Maintenance Instructions - Model BFP-8F