

Application

Wilkins model FSC is designed for installation on water lines to protect downstream equipment from malfunction or premature failure due to build-up of sediment or debris.



Standards Compliance

- MIL-S 16293F Type 2
 - Meets the requirements of NSF/ANSI/CAN 372*
- *(LESS THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT)

Materials

Main Valve Body	Ductile Iron ASTM A536
Access Covers	Ductile Iron ASTM A536
Coatings	Fusion epoxy finish (meets requirements of NSF/ANSI/CAN 61)
Screens	Perforated 300 series Stainless Steel

Features

Sizes 2-1/2", 3", 4", 6", 8", 10", 12"	200 psi @ 150°F WOG
Pressure/temperature	125 psi @ 450°F Steam
End connections	ASME B16.42 Class 150




2 1/2" FSC

Accessories

Repair Kits (2-1/2" - 10")

Screen

SIZE inch	OPENINGS (dia.)	MATERIAL THICKNESS	HOLES PER sq(in)	OPEN AREA
2 1/2	0.045	0.020 (26 Ga.)	225	36%
3	0.045	0.020 (26 Ga.)	225	36%
4	1/16	0.020 (26 Ga.)	98	30%
6	1/16	0.020 (26 Ga.)	98	30%
8	1/8	0.020 (26 Ga.)	29	36%
10	1/8	0.032 (22 Ga.)	29	36%
12	1/8	0.025 (24 Ga.)	35	43%

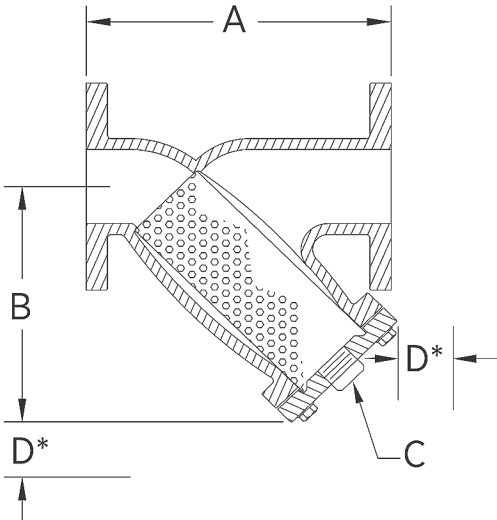


SIZE		DIMENSIONS (approximate)							WEIGHT	
		A		B		C	D*			
in	mm	in	mm	in	mm		in	mm	lbs.	kg.
2 1/2	65	10	254	8 1/4	210	1 1/4 NPT	6	152	35	16
3	80	10 1/2	267	9 1/4	235	1 1/4 NPT	6	152	45	20.5
4	100	15	381	12 1/2	318	2 NPT	9	229	61	27.5
6	150	18	457	14	356	2 NPT	10	254	165	75
8	200	24 1/4	616	17 3/4	451	2 NPT	11	279	239	108.5
10	250	29 1/2	749	21 1/4	540	2 NPT	14	356	394	178.5
12	300	29 7/8	759	21 5/16	541	2 NPT	17	432	489	222

*Clearance for screen removal

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

Flow Characteristics


◇ Rated Flow (established by approval agencies)

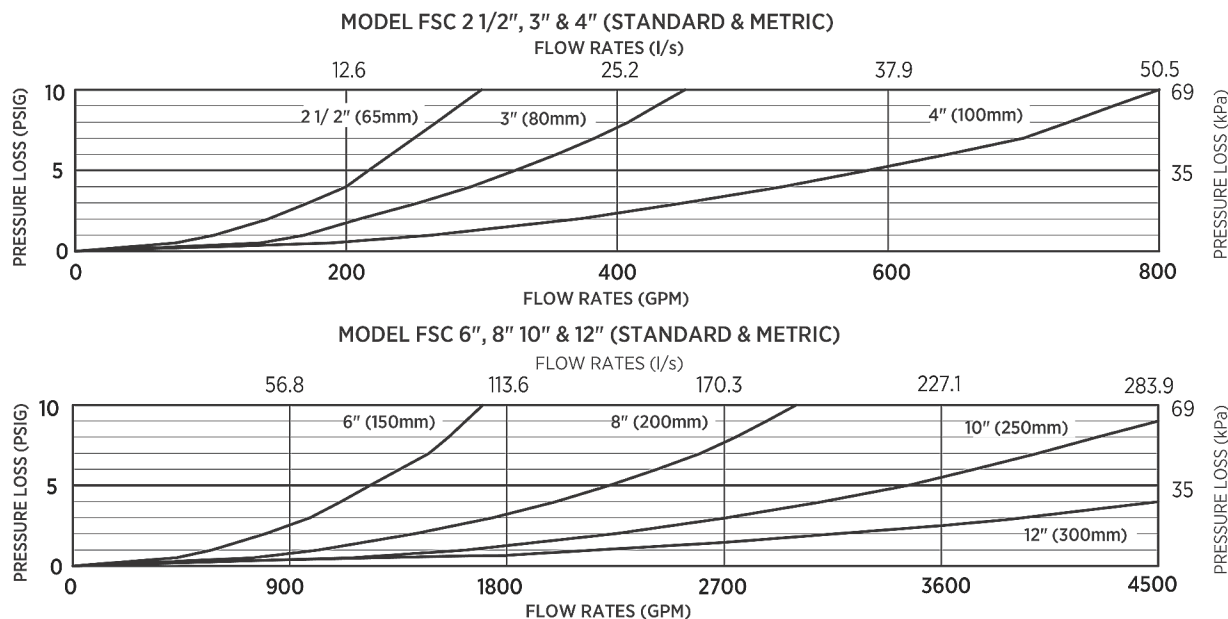


Typical Installation

Local codes shall govern installation requirements. Unless otherwise specified, the assembly shall be mounted with sufficient clearance for maintenance in accordance with the manufacturers' instructions and the latest edition of the Uniform Plumbing Code. The installation shall be made so that no part of the unit can be submerged. Horizontal installation with the strainer cap facing downward is the preferred installation orientation; however the strainer will provide protection in any orientation.

Capacity thru Schedule 40 Pipe (GPM)				
Pipe Size	5 ft/sec	7.5 ft/sec	10 ft/sec	15 ft/sec
2 1/2"	75	112	149	224
3"	115	173	230	346
4"	198	298	397	595
6"	450	675	900	1351
8"	780	1169	1559	2339
10"	1229	1843	2458	3687
12"	1744	2617	3489	5233

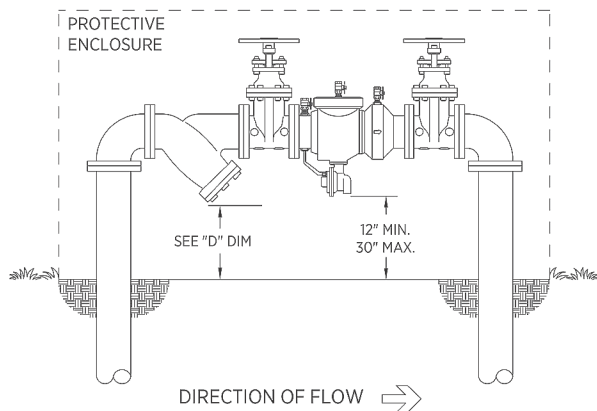

Outdoor Installation

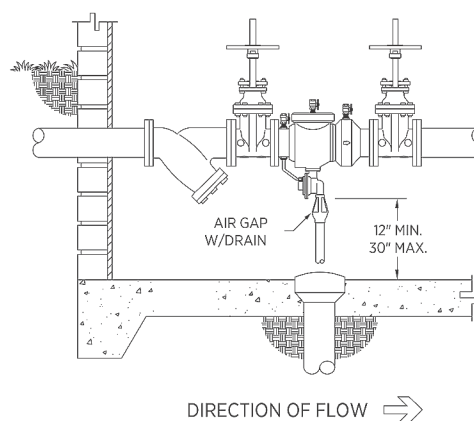

Indoor Installation

Specifications

The Ductile Iron wye type strainer meet the requirements of NSF/ANSI/CAN 372, and in compliance with MIL-S-16293F Type 2. The main body and access cover shall be ductile iron ASTM A536 with an NSF/ANSI/CAN 61 certified Fusion Epoxy Finish coating inside and out. The integral strainer screen shall be accessible for cleaning without removing the device from the line. The Ductile Iron wye type strainer shall be a WILKINS Model FSC.