
Hydro•X® Power Concealed Sensor Flush Valve for Concealed Back Spud Urinal

ZHYD95-LP

TAG _____

ARCHITECTURAL/ENGINEERING SPECIFICATION

Zurn Concealed Hydro•X® Power series of sensor flush valves for wall mounted urinals are designed for reliable, hands-free operation that lasts the life expectancy of a commercial restroom. This hydropowered sensor flush valve for wall mounted urinal requires no hard wiring or battery replacement, which means lower installation and maintenance costs. The gear-operated flush valve features a clog-resistant, triple filtered diaphragm. It is sensor activated to support a more hygienic environment by eliminating touch points. Pair with Hydro•X® Power faucets to maximize sustainable restroom goals.

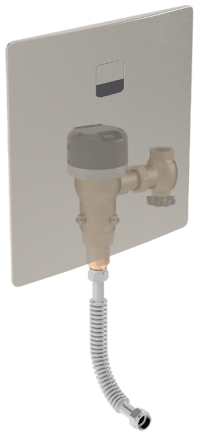

PRODUCT FEATURES

- Architectural front access wall plate eliminates need for plumbing chase access to install & service valve, hidden fasteners for clean aesthetic and EZ access hinged opening mechanism for ease of service.
- Hydro•X® Power technology delivers sustainable performance by providing renewable, uninterrupted hydropower designed to last the life expectancy of a commercial restroom.
- Uses EZ Gear technology, a gear-driven ceramic cartridge that is less susceptbile to debris and buildup for easy maintenance; outlasts and outperforms solenoids.
- Industry-leading, triple filtered AquaVantage diaphragm, gaskets and seals are made of chemical-resistant thermoplastic elastomer, which lasts 8-10 times longer than traditional rubber, reducing maintenance costs.
- Automatic touchless sensor activation reduces guest visits without a flush and can help reduce germ transmission.
- Electronic override button delivers on-demand manual flushing.
- Heavy-duty wall plate construction with a highly polished chrome-plated, brushed nickel or matte black PVD finishes provides long-term durability and vandal resistance in a contemporary design.
- Standard 24-hour line flushing to help minimize stagnation and maintain fixture trap seals to protect against sewer gases during periods of inactivity.
- User-in-view LED indicator light.
- Concealed flush valve is also furnished with labor saving flexible stainless steel outlet piping for easy front of wall installation, a 3/4" wheel control stop with internal siphon-guard protection, sweat solder kit, and high-pressure vacuum breaker assembly for 3/4" back spud inlet.
- Wall plate dimensions: 11" (W) x 12 ½" (H)
  Wall Opening: 9 ½" (W)x 11 ½" (H)
- Operating Pressure
  25 psi (running) - 80 psi (static)
  Higher running pressure may be required for some fixtures
  Consult fixture manufacturer for details.
- Rigid piping available upon request

COMPLIANCE AND CERTIFICATION

- Complies with ASSE 1037/ASME A112.1037/CSA B125.37
- ADA Compliant

*This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

FLOW OPTIONS

	FLUSH VOLUME GPF	WATERSENSE* COMPLIANT	CEC, CALGREEN COMPLIANT
☐ **-ULF**	0.125	✓	✓
☐ **-EWS**	0.5	✓	
☐ **-WS1**	1.0		

SUFFIX OPTIONS

☐ -FS	4" - 6" L Dimension
☐ -FM	7" - 8" L Dimension
☐ -FL	9" - 10" L Dimension
☐ -FXL	11" – 12" L Dimension

ALTERNATIVE FINISHES


☐ -BN	Brushed Nickel
☐ -MB	Matte Black

ARCHITECTURAL & ENGINEERING APPROVAL

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.

Rev. B | Date: 11/11/2026 | C.N. No. 148426 | Prod./Dwg. No. SS ZHYD95-LP

Rough-in dimensions/Overview dimensions

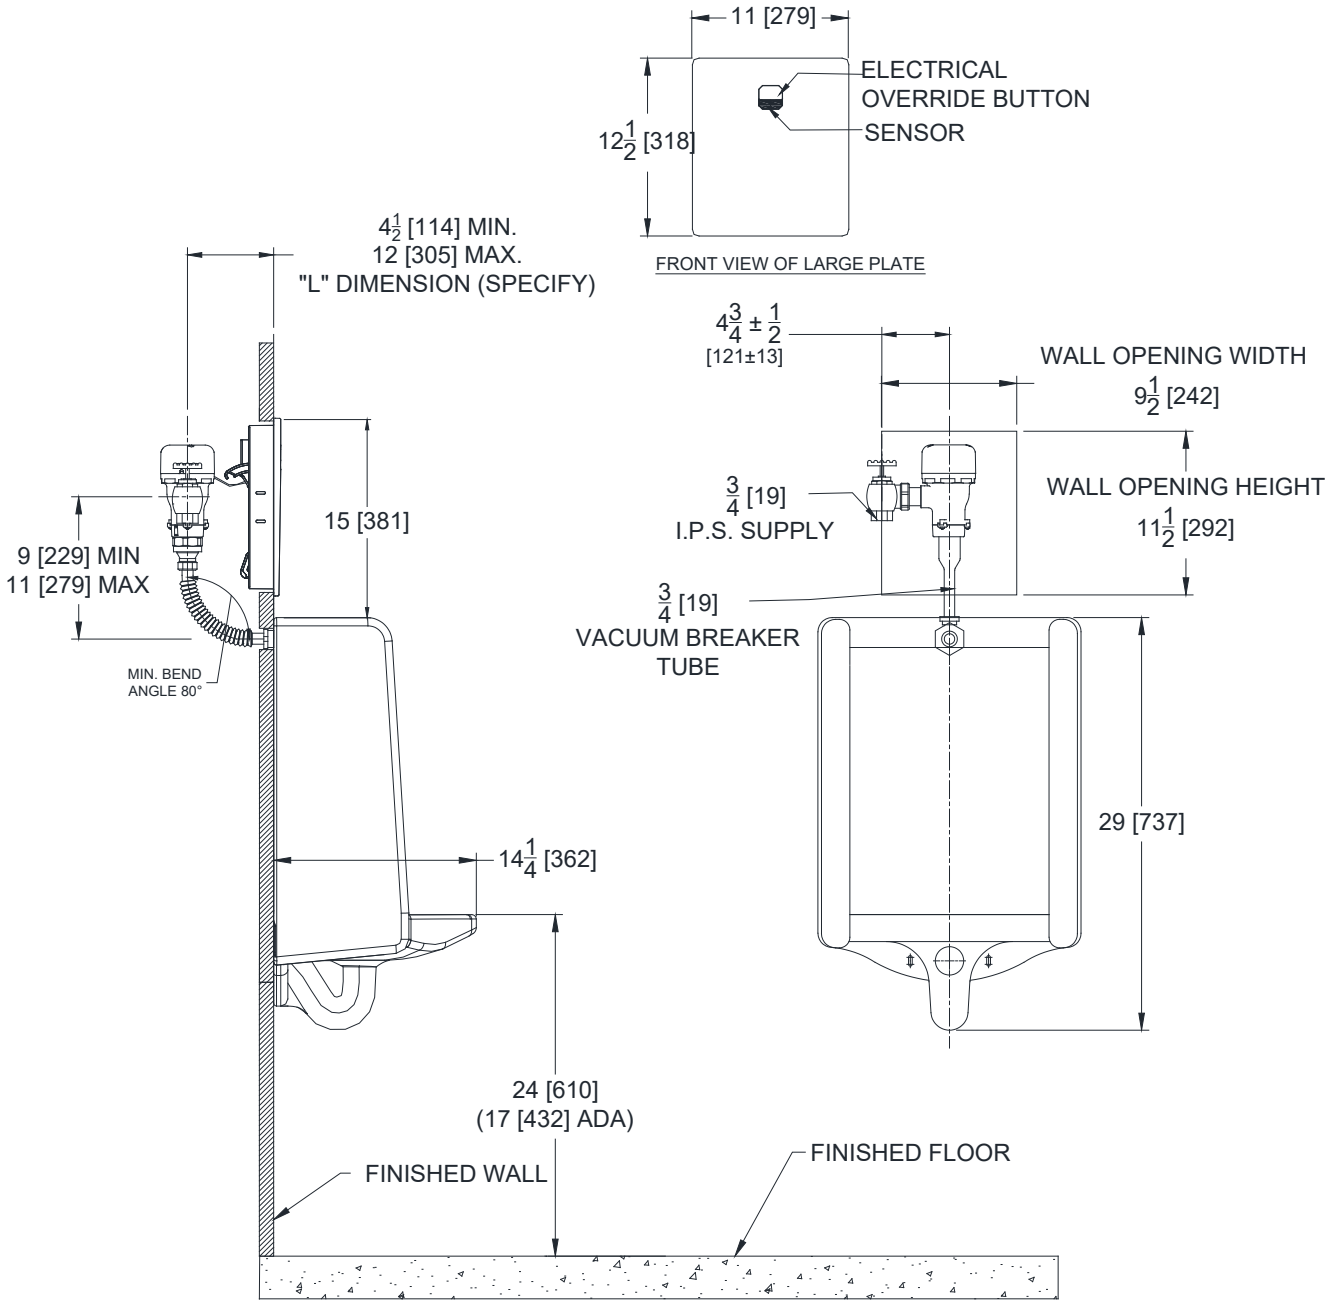

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Patent zurn.com/patents
US 1.855.ONE.ZURN **CANADA** 1.877.892.5216
ZURN.COM

by zurn ELKAY Water Solutions