



TAG _____

ARCHITECTURAL & ENGINEERING SPECIFICATION

Complete EcoVantage® high efficiency 0.125 gpf sensor actuated, hydro-powered, wall mounted commercial urinal system with Z5755-U Omni-Flo top spud urinal, ZER6003AV-ULF-HYD exposed, sensor activated with manual override button chrome-plated closet diaphragm flushometer for either left or right hand supply manufactured by Zurn.

PRODUCT FEATURES

- 0.125 gpf (gallons per flush)
- Wall mounted extended rim top spud urinal
- High efficiency siphon washout flush action
- Integral trap
- Vitreous china wall urinal construction
- Gear-operated flush valve with hydro-powered operation
- Heavy-duty construction body with a highly polished chrome-plated finish
- Triple filtered AquaVantage® diaphragm, gaskets and seals are made of chemical-resistant thermoplastic elastomer
- High pressure vacuum breaker
- Adjustable tailpiece
- True mechanical override button
- Control stop with internal siphon-guard protection, vandal-resistant stop cap, sweat solder kit, cast wall flange with set screw
- Asymmetric backwall for reduced splash back
- Oversized footprint to make retrofit easy
- Vandal resistant outlet strainer included
- 88% water savings over standard 1.0 gpf system

COMPLIANCE AND CERTIFICATION:

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

- Fixture - Complies with ASME A119.2 / CSA B45.1
- Flush Valve - Complies with ASSE 1037 / ASME A112.1037 / CSA B125.37



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.



ZURN ONE SYSTEM PACKOUT INCLUDES:

FIXTURE - Z5755-U:

0.125 gpf [0.5 lpf] to 1.0 gpf [3.8 lpf] vitreous china, wall hung, integral trap, washdown urinal complete with 3/4" [19mm] top spud connection, concealed universal retrofit wall bracket, 2" [51mm] outlet connection and vandal resistant outlet strainer


FLUSH VALVE - ZER6003AV-ULF-HYD:

Zurn Hydro•X® Power series of sensor flush valves for urinals are designed for reliable, hands-free operation that lasts the life expectancy of a commercial restroom. This hydro-powered sensor flush valve for urinals requires no hard wiring or battery replacement, which means lower installation and maintenance costs. The gear-operated flush valve features a clog-resistant, triple filtered diaphragm. It is sensor activated to support a more hygienic environment by eliminating touch points. Pair with Hydro•X® Power faucets to maximize sustainable restroom goals




The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

Rough-in/Overview dimensions

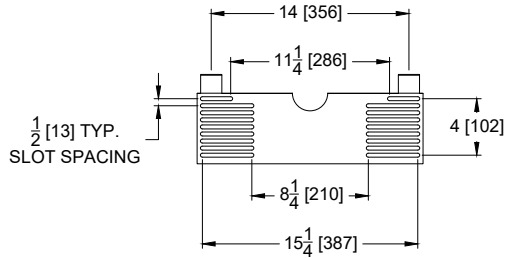

UNIVERSAL RETROFIT
BRACKET (UB)

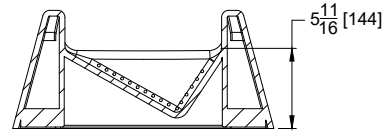

SECTION A-A

