




Z415LRS

BODY ASSEMBLY W/ "TYPE LRS" LIGATURE RESISTANT STRAINER

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

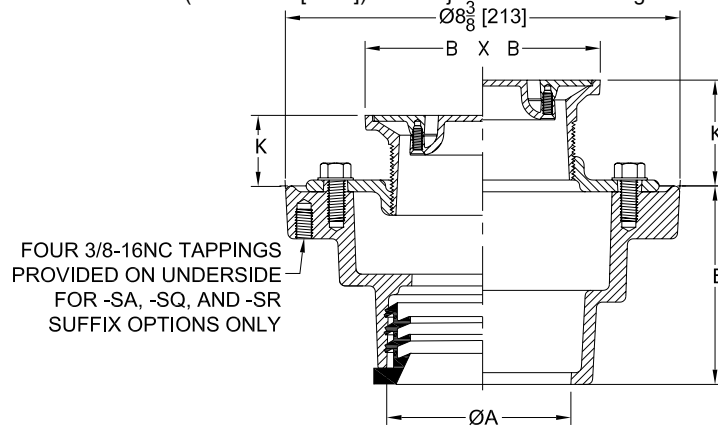

Dimensions in Inches [mm]						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm²]
A - Pipe Size	B x B' Strainer Top Size	K		K'			
		Min.	Max.	Min.	Max.		
2,3 [51,76]	5 x 5 [127 x 127]	1 [25]	1-19/32 [40]	1-1/4 [32]	2-3/8 [60]	12 [5]	1.9 in² [12.3 cm²]
2,3,4 [51,76,102]	6 x 6 [152 x 152]	1 [25]	1-27/32 [47]	1-13/32 [36]	2-19/32 [66]	13 [6]	1.9 in² [12.3 cm²]

ENGINEERING SPECIFICATION: Z415LRS

Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE LRS" vandal proof ligature resistant** strainer.

OPTIONS (Check/specify appropriate options)**PIPE SIZE** (Specify size/type)**OUTLET****E' BODY HT. DIM.**

2,3,4 [51,76,102]	_____ IC	Inside Caulk	4-3/16	[106]
2,3,4 [51,76,102]	_____ IG	Inside Gasket	4-3/16	[106]
2 [51]	_____ IP	Threaded	2-7/16	[62]
3 [76]	_____ IP	Threaded	2-3/4	[70]
4 [102]	_____ IP	Threaded	2-13/16	[71]
6 [152]	_____ IP	Threaded	2-7/8	[73]
2,3,4 [51,76,102]	_____ NH	No-Hub	3-13/16	[97]
2,3,4 [51,76,102]	_____ NL	Neo-Loc	3-7/8	[98]

PREFIXES

_____ ZN	Polished Nickel Bronze Top
_____ ZS	Stainless Steel Top*

SUFFIXES

_____ -AR	Acid Resisting Epoxy Coated Cast Iron	_____ -SR	Stabilizer Ring
_____ -CP	Chrome-Plated Bronze Top	_____ -SQ	Stabilizer Q-Deck (See Z1035-Q)
_____ -G	Galvanized Cast Iron	_____ -TC	Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Outlet Only)
_____ -P	Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])	_____ -U	1-3 [25-76] High Extension Adapter
_____ -PC	Protective Cover	_____ -V	Backwater Valve
_____ -SA	Stabilizer Assembly (See Z1035)	_____ -Y	Sediment Bucket
		_____ -90	90° Threaded Side Outlet Body Assembly (2,3 [51,76] Only)

* Regularly furnished unless otherwise specified.

**DISCLAIMER: By "ligature resistant," Zurn refers to the fact that this product is designed and manufactured to reduce the risk that it may be utilized as an apparatus for ligature. Zurn does not represent or warrant that this product is incapable of being used for ligature or ligature-free, and Zurn will not be liable for any claims, loss, or damages arising from ligature attachment on our products. This product is not a replacement for professionals who are trained in the proper evaluation, management, and supervision of persons at risk of self-harm or suicide. It is the purchaser's responsibility to ensure that products purchased and installed are suitable for the environments in which they are installed, and that suitable supervision and protective measures are in place to protect those at risk.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov**⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov****⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov**

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. PRELIMINARY Page 1 of 1
Date: 03/27/25
C.N. No. XXXXXX
Patent zurn.com/patents
Prod. | Dwg. No. Z415LRS