




Z529

9 [229] SOLID HINGED LIGHT DUTY DRAIN

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

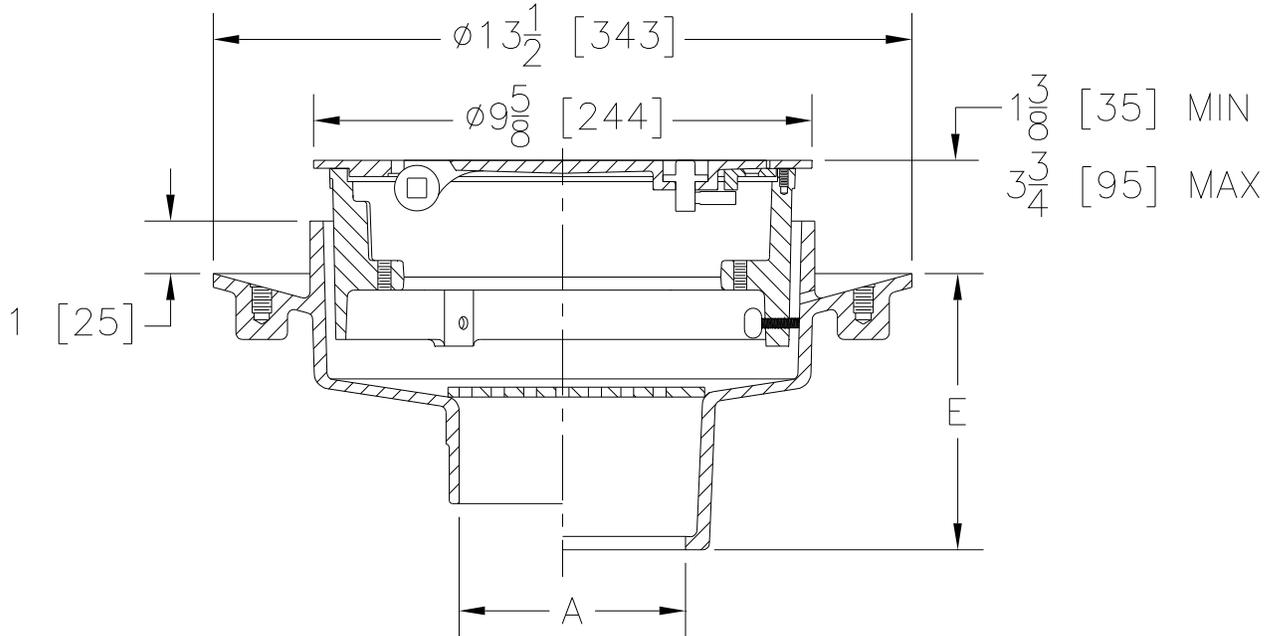

A- Pipe Size In.	Approx. Wt. Lbs. [kg]
2-3-4 [51-76-102]	35 [13]
6 [152]	40 [15]

ENGINEERING SPECIFICATION: ZURN ZN529

9 [229] Diameter top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and adjustable extension frame for nickel bronze rim and hinged type locking light duty cover with secondary strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]
- 2 thru 4,6 [51 thru 102,152]
- 2 thru 4 [51 thru 102]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IG Inside Gasket
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' DIM.

- 5-1/4 [133]
- 5-1/4 [133]
- 3-1/2 [89]
- 4-1/4 [108]
- 4-3/8 [111]

PREFIXES

- _____ ZB D.C.C.I. Body with Polished Bronze Top
- _____ ZN D.C.C.I. Body with Polished Nickel Bronze Top*

SUFFIXES

- _____ -C Clamp Collar
- _____ -G Galvanized Cast Iron
- _____ -HL Hinged Locking Gate
- _____ -P Trap Primer Connection
- _____ -T 10 [254] Square Top
- _____ -TC Neo-Loc Test Cap Gasket (2 [51] - 4 [102] NL Bottom Outlet Only)
- _____ -V Backwater Valve (See Z1099)
- _____ -Y Sediment Bucket

REV. E	DATE: 11/16/10	C.N. NO. 120449
DWG. NO. 58934	PRODUCT NO. Z529	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED