



Model(s) Z5655-BWL1

EcoVantage® HET Floor-mounted Toilet System

TAG

Architectural/Engineering Specification:

Vitreous China, 1.1 gpf [4.2 lpf] or greater high efficiency, floor mounted, bottom outlet toilet with siphon jet flushing action, ZurnSHIELD™ ceramic glaze, and elongated rim with 1-1/2" back spud. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush, engineered to provide optimal performance and 30% water savings over conventional 1.6 gpf toilets.

PRODUCT FEATURES:

- Zurn HET Toilet System designed for optimal performance between Zurn fixture and Zurn flush valve at 1.1 gpf (4.2 Lpf), 1.6 gpf (6.0 Lpf) or Dual Flush volumes to save water.
- 1.1 gpf offers 31% water savings over 1.6 gpf system
- Vitreous china
- ZurnSHIELD™ ceramic glaze creates a permanent surface that protects the fixture by inhibiting the growth of stain and odor causing mold mildew and bacteria, thus reducing the amount of time, chemicals and water to clean the bowl.
- Elongated rim
- 1-1/2" Back Spud
- 2-1/8" fully glazed trapway
- High efficiency siphon jet flush action
- Shipping Weight: 55 lbs.

VARIANT OPTIONS:

Z5655-BWL1	Top spud toilet
Z5655-BWL1-AM	Top spud toilet with ZurnSHIELD™ glaze

Recommended Trim:

Z5955SS-EL	Elongated, standard white, open front toilet seat less cover with stainless steel check hinge
Z5972-COMB	Closet bolt and wax ring kit

RECOMMENDED ZURN ONE SYSTEMS

Complete fixture package with Z5655-BWL1 bowl, flush valve, seat and trim.

See complete spec sheets for rough-in details.

Item Number	Description	Flush Valve GPF
Z.WC3.M	Manual Z6000AV-ONE system	1.1
Z.WC3.S	EZ Flush ZER6000AV-ONE-SM system	1.1
Z.WC3.S.TM	Top Mount Sensor ZER6000AV-ONE-TM system	1.1
Z.WC4.M	Manual Z6000AV-ONE system	1.28
Z.WC4.S	EZ Flush ZER6000AV-ONE-SM system	1.28
Z.WC4.S.TM	Top Mount Sensor ZER6000AV-ONE-TM system	1.28



Product Compliance:

ASME A112.19.2/CSA B45.1
CEC
CSA B45.1
IPC
WaterSense



*This product should be used with a WaterSense labeled counterpart with a compatible flow volume to ensure that the entire system meets the requirements for water efficiency and performance.

**Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.*

[Installation Guide - fv867.pdf](#)

Architectural/Engineering Approval

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠ WARNING: Cancer and Reproductive Harm – www.P65warnings.ca.gov

⚠ ADVERTENCIA: Cáncer y daño reproductivo – www.P65warnings.ca.gov

⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov

by Zurn Elkay Water Solutions

ZURN.COM

Patent zurn.com/patents

© 2025 Page 1

5900 Elwin Buchanan Drive, Sanford, NC 27330

US 1.855.ONE.ZURN Sensor.Products@zurn.com


3544 Nashua Drive, Mississauga, Ontario L4V1L2

CANADA 1.877.892.5216 Sensor.Products@zurn.com

[Z5655-BWL1](#)

[Z5655-BWL1_spec.pdf](#)

REV 9/17/2025

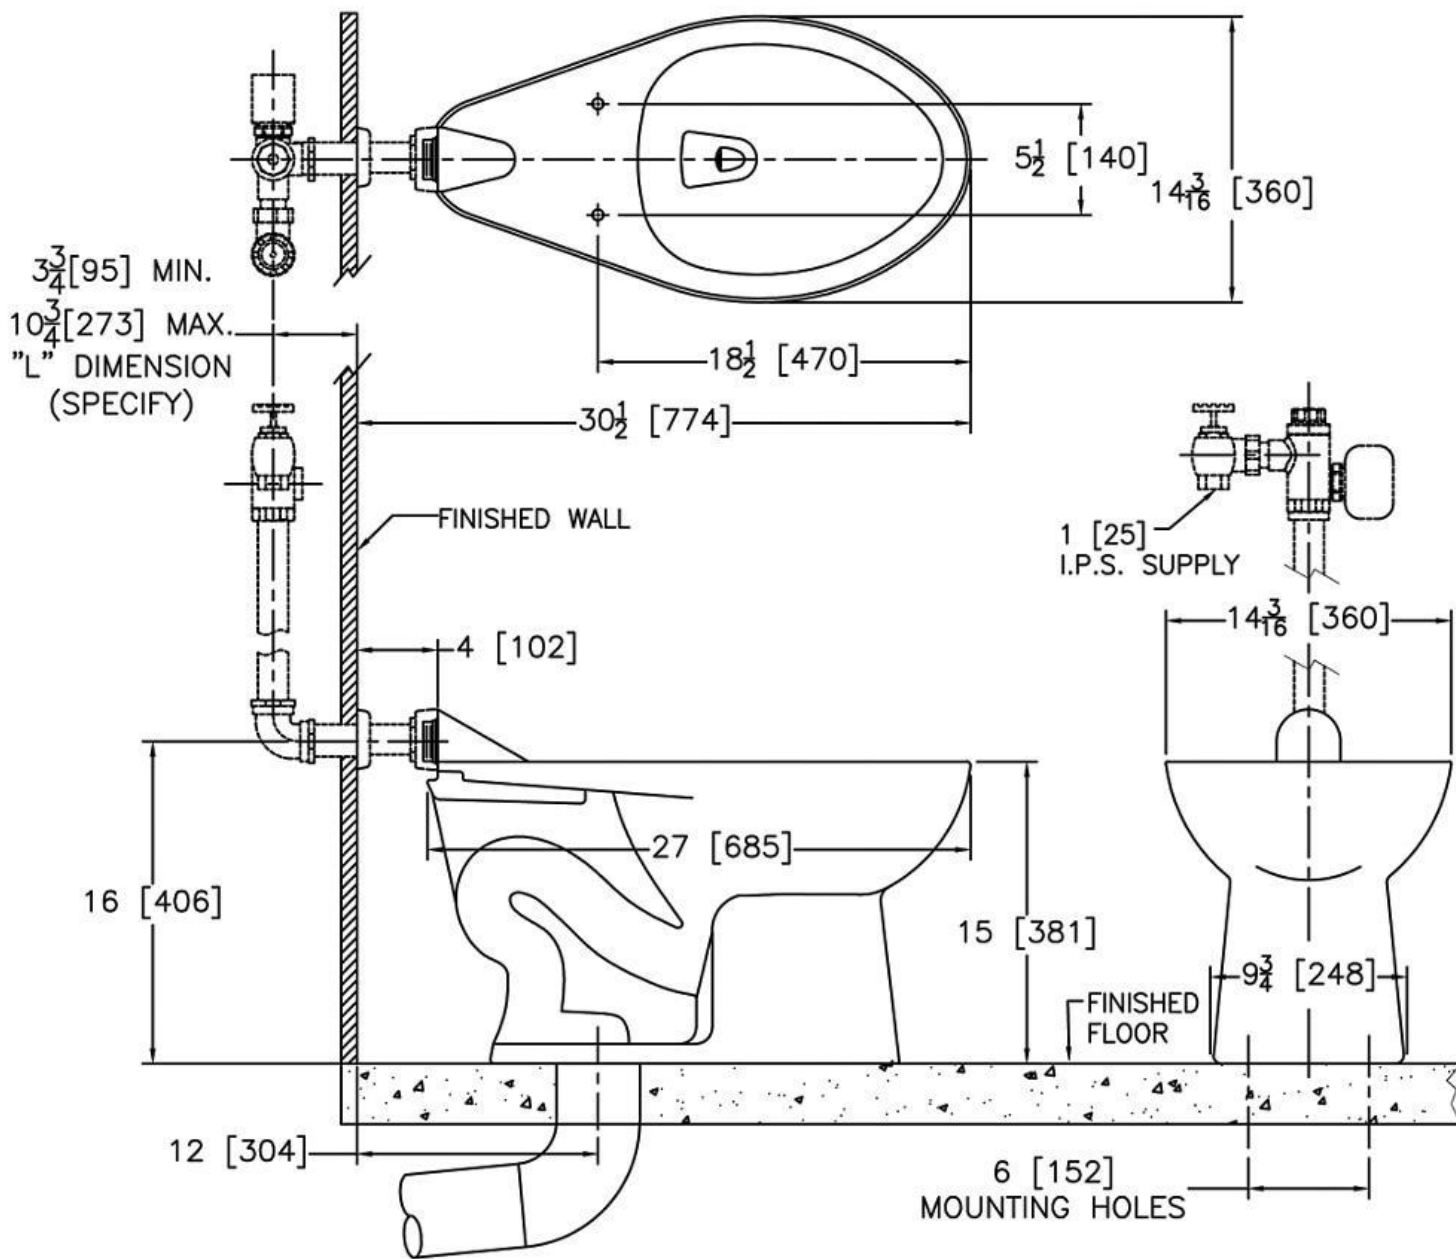

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠ WARNING: Cancer and Reproductive Harm – www.P65warnings.ca.gov
 ⚠ ADVERTENCIA: Cáncer y daño reproductivo – www.P65warnings.ca.gov
 ⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov