

# Model(s) <u>Z6003</u>

# Aquaflush Exposed Urinal Flush Valve

## Architectural/Engineering Specification:

Exposed, quiet diaphragm-type, chrome plated flushometer valve with a polished exterior. Complete with a chloramine resistant, dual seal diaphragm with a clog resistant by-pass. The valve is ADA compliant with a nonhold open and no leak handle feature. Internal seals are made of chloramine resistant materials.

### PRODUCT FEATURES:

- Control Stop has internal siphon-guard protection, sweat solder kit, wall flange with set screw.
- High back pressure vacuum breaker with one piece hex coupling nut
- Chloramine resistant Internal seals
- Adjustable tailpiece
- Spud coupling and flange for top spud connection

#### **VALVE HEIGHT OPTIONS:**

	Vacuum Tube Length	Rough-in Height "A"
Standard	8-1/2" [216"]	11-1/2" [292]
-1	13" [330]	16" [406]
-2	21" [533]	24" [610]
-3	24" [610]	27" [686]

#### FLOW OPTIONS:

	Flush Volume	*WaterSense Labeled
-ULF	0.125 gpf	X
-EWS	0.5 gpf	Х
-WS1	1.0 gpf	
-Standard	1.5 gpf	

#### SUFFIX OPTIONS:

-BG	BioCare ADA Handle
-D1	1" Supply
-H	Handle on Front of Flush Valve
-HL	1" [25mm] Metal Push Button on Front
-L	1" [25mm] Metal Push Button
-VC	Vandal Resistant Stop Cover
-YJ	Split Ring Pipe Support
-YK	Solid Ring Pipe Support



Product Compliance:

ADA

ASSE 1037/ASME A112.1037/CSA B125.37

ASSE 1037 CSA B125.37 IPC

WaterSense

\*Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.



\*This product should be used with a WaterSense labeled counterpart with a compatible flow volume to ensure that the entire system meets the requirements for water efficiency and performance.

\*Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.

Installation Guide - FV250.pdf


Architectural/Engineering Approval

▲WARNING: Cancer and Reproductive Harm – <u>www.P65warnings.ca.gov</u>
▲ADVERTENCIA: Cáncer y daño reproductivo – <u>www.P65warnings.ca.gov</u>

AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.



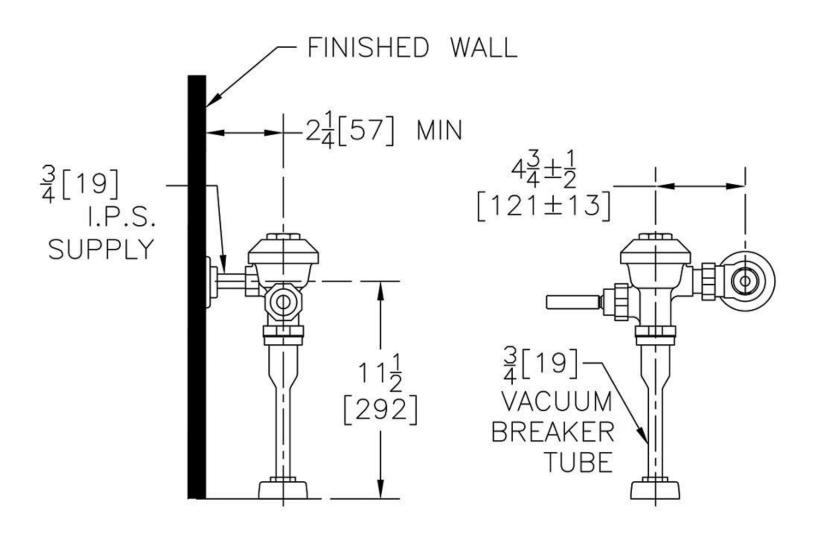

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

▲ WARNING: Cancer and Reproductive Harm – <u>www.P65warnings.ca.gov</u> ▲ADVERTENCIA: Cáncer y daño reproductivo – <u>www.P65warnings.ca.gov</u> AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – <u>www.P65warnings.ca.gov</u>