# Model(s) Z6003AV

AquaVantage® 'AV' Exposed Urinal Flush Valve

## TAG

## Architectural/Engineering Specification:

Exposed, quiet diaphragm-type, chrome plated flushometer valve with a polished exterior. Complete with Zurn's AquaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered by-pass. The valve is ADA compliant with a non-hold open and no leak handle feature. Internal seals are made of chloramine resistant materials.

#### PRODUCT FEATURES:

- Proprietary Dezincification resistant low lead brass alloy
- Control Stop has internal siphon-guard protection and vandal resistant stop cap, Sweat solder kit, wall flange with set screw.
- High back pressure vacuum breaker with one piece hex coupling nut
- Chloramine resistant Internal seals
- Adjustable tailpiece
- Spud coupling and flange for top spud connection

## VALVE HEIGHT OPTIONS:

 THE TENEROUS OF THORION				
	Vacuum Tube Length	Rough-in Height "A"		
Standard	8-1/2" [216"]	11-1/2" [292]		
-1	13" [330]	16" [406]		
-2	21" [533]	24" [610]		
-3	24" [610]	27" [686]		

## FLOW OPTIONS:

	Flush Volume	*WaterSense Labeled
-ULF**	0.125 gpf	Х
-EWS**	0.5 gpf	Х
-WS1	1.0 gpf	
-Standard	1.5 gpf	

<sup>\*\*</sup> Not available with triple filter by-pass

# **SUFFIX OPTIONS:**

-BG	BioCare ADA Handle
-D1	1" Supply
-H	Handle on Front of Flush Valve
-HL	1" [25mm] Metal Push Button on Front
-L	1" [25mm] Metal Push Button
-YJ	Split Ring Pipe Support
-YK	Solid Ring Pipe Support



Product Compliance:

ADA

ASSE 1037/ASME A112.1037/CSA B125.37

ASSE 1037 CSA B125.37 IPC

WaterSense

\*Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.



\*This product should be used with a WaterSense labeled counterpart with a compatible flow volume to ensure that the entire system meets the requirements for water efficiency and performance.

\*Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.

Installation Guide - FV211.pdf


Architectural/Engineering Approval

▲ WARNING: Cancer and Reproductive Harm – <u>www.P65warnings.ca.gov</u>
▲ ADVERTENCIA: Cáncer y daño reproductivo – <u>www.P65warnings.ca.gov</u>

AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65warnings.ca.gov

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.



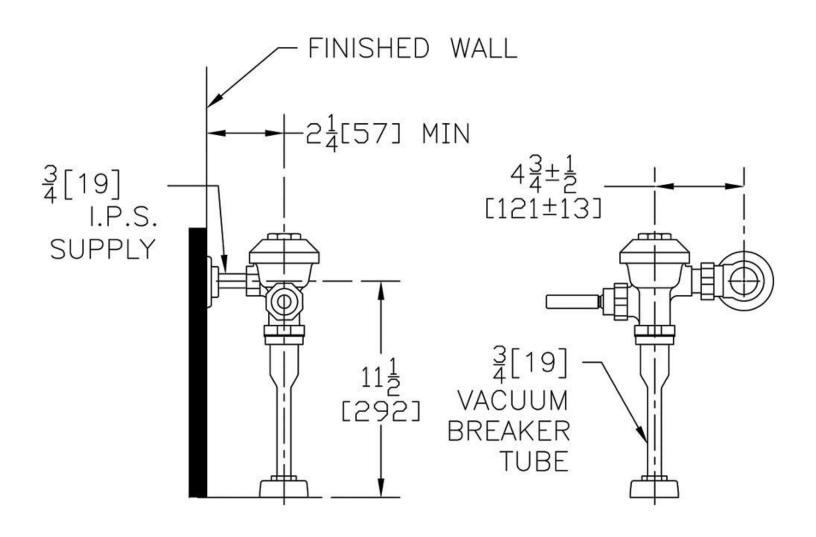

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

▲WARNING: Cancer and Reproductive Harm – <u>www.P65warnings.ca.gov</u>

▲ADVERTENCIA: Cáncer y daño reproductivo – <u>www.P65warnings.ca.gov</u>

▲AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – <u>www.P65warnings.ca.gov</u>