Architectural/Engineering Specification:

Exposed, quiet diaphragm-type, chrome plated, flushometer valve with a polished exterior. Complete with Zurn's AquaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered by-pass. The valve is ADA compliant with a non-hold open and no leak handle feature, high back pressure vacuum breaker, one piece hex coupling nut and adjustable tailpiece. Control stop has internal siphon-guard protection, vandal resistant stop cap, sweat solder kit and a cast wall flange with set screw. Internal seals are made of chloramine resistant materials.

FLOW OPTIONS:

		Flush Volume	*WaterSense Labeled
☐	-ONE**	1.1 gpf	x
☐	-HET**	1.28 gpf	x
☐	-WS1	1.6 gpf	
☐	-Standard	3.5 gpf	
☐	-FF	4.5 gpf	

** Not available with triple filter by-pass

SUFFIX OPTIONS:

☐	-BG	BioCare ADA Handle
☐	-H	Handle on Front of Flush Valve
☐	-HL	1" [25mm] Metal Push Button on Front
☐	-L	1" [25mm] Metal Push Button
☐	-YJ	Split Ring Pipe Support
☐	-YK	Solid Ring Pipe Support

Product Compliance: ADA
ASSE 1037/ASME A112.1037/CSA B125.37
ASSE 1037
CSA B125.37

*Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.
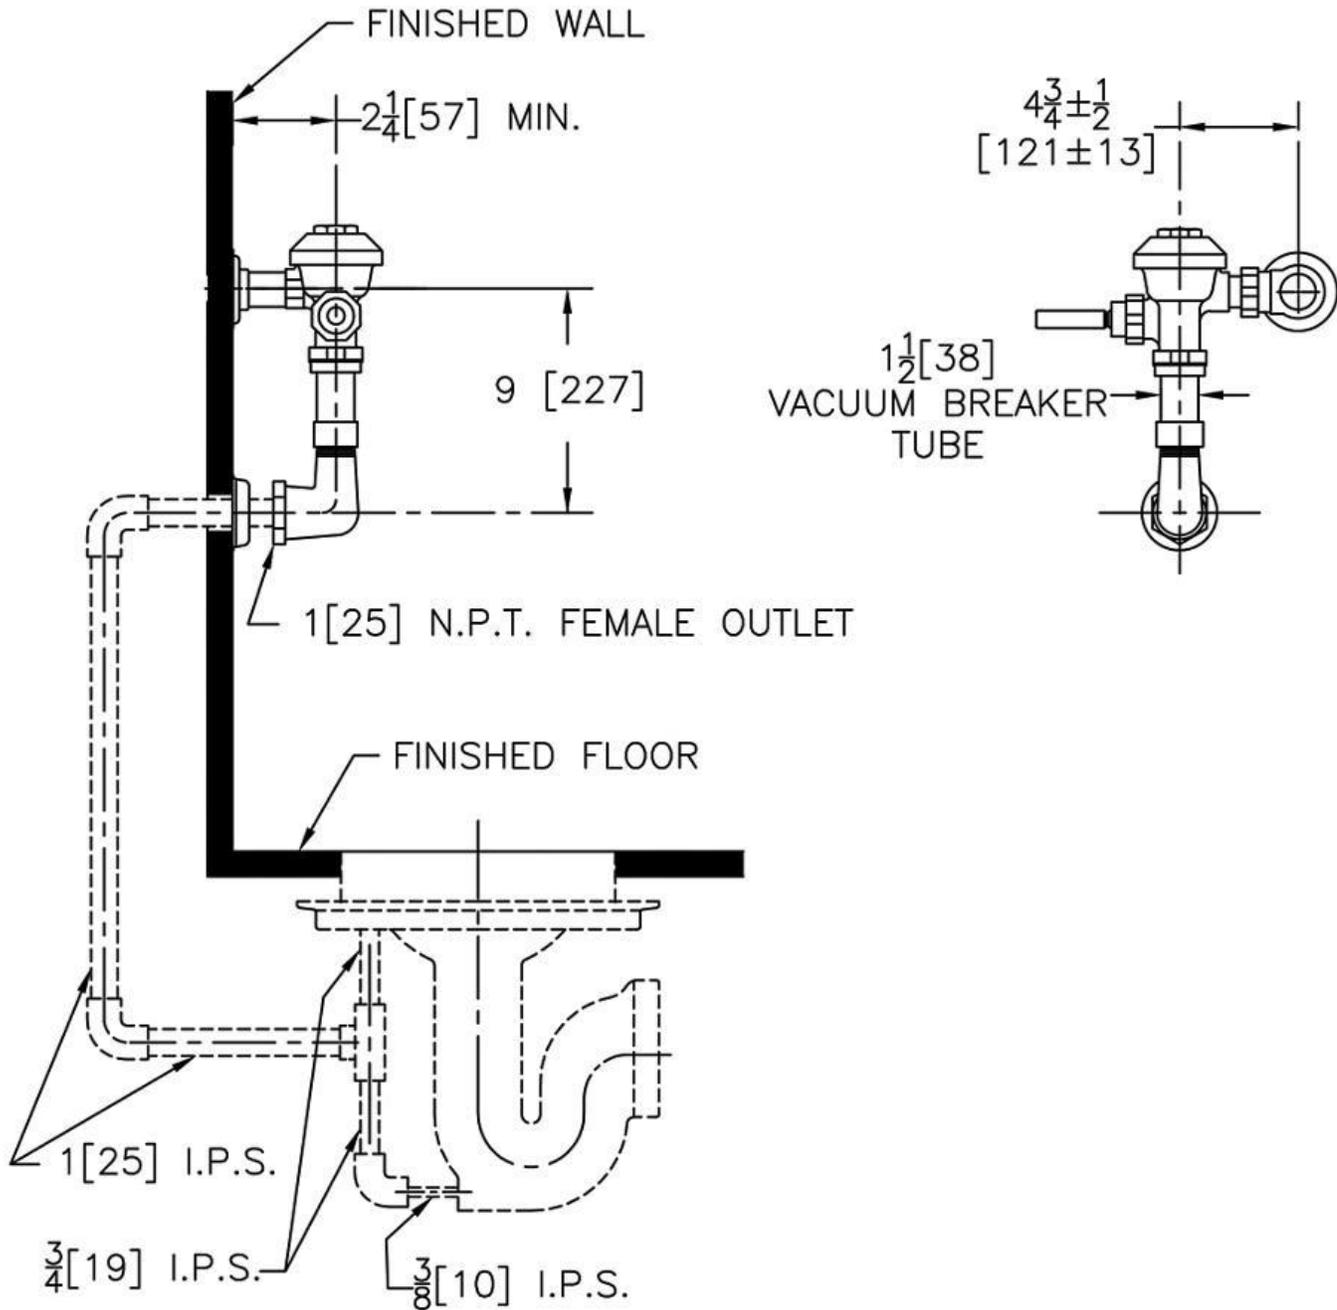
*Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.

Installation Guide - fv211.pdf

Architectural/Engineering Approval

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

by Zurn Elkay Water Solutions
ZURN.COM
Patent zurn.com/patents
© 2026   Page 1

5900 Elwin Buchanan Drive, Sanford, NC 27330
US 1.800.997.3876 Sensor.Products@zurn.com
3544 Nashua Drive, Mississauga, Ontario L4V1L2
CANADA 1.877.892.5216 Sensor.Products@zurn.com

Z6099AV
Z6099AV_spec.pdf
REV 1/27/2026

FINISHED WALL

$2\frac{1}{4}$[57] MIN.

9 [227]

1[25] N.P.T. FEMALE OUTLET

FINISHED FLOOR

1[25] I.P.S.

$\frac{3}{4}$[19] I.P.S.

$\frac{3}{8}$[10] I.P.S.

$4\frac{3}{4}\pm\frac{1}{2}$
[121±13]

$1\frac{1}{2}$[38]
VACUUM BREAKER
TUBE

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.