Architectural/Engineering Specification:

Concealed, quiet diaphragm-type, rough brass flushometer valve with Zurn's AquaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered by-pass. The valve incorporates a non-hold-open, no leak push button with a 1"[25] metal push button, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece and spud coupling for back spud connection. Control stop has internal siphon-guard protection and sweat solder kit. Internal seals are made of chloramine resistant materials.

PRODUCT FEATURES:

- Proprietary Dezincification resistant low lead brass alloy
- Control Stop has internal siphon-guard protection and vandal resistant stop cap, Sweat solder kit, wall flange with set screw.
- High back pressure Vacuum Breaker with one piece hex coupling nut
- Chloramine resistant Internal seals
- Adjustable tailpiece
- Spud coupling and flange for back spud connection

FLOW OPTIONS:

		Flush Volume	*WaterSense Labeled
☐	-ONE**	1.1 gpf	x
☐	-HET**	1.28 gpf	x
☐	-WS1	1.6 gpf	
☐	-Standard	3.5 gpf	
☐	-FF	4.5 gpf	

** Not available with triple filter by-pass

SUFFIX OPTIONS:

☐	-L3	3" [76mm] Metal Push Button

Product Compliance: ADA
ASSE 1037/ASME A112.1037/CSA B125.37
ASSE 1037
CSA B125.37

*Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

*Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.

Installation Guide - FV247.pdf

Architectural/Engineering Approval

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.
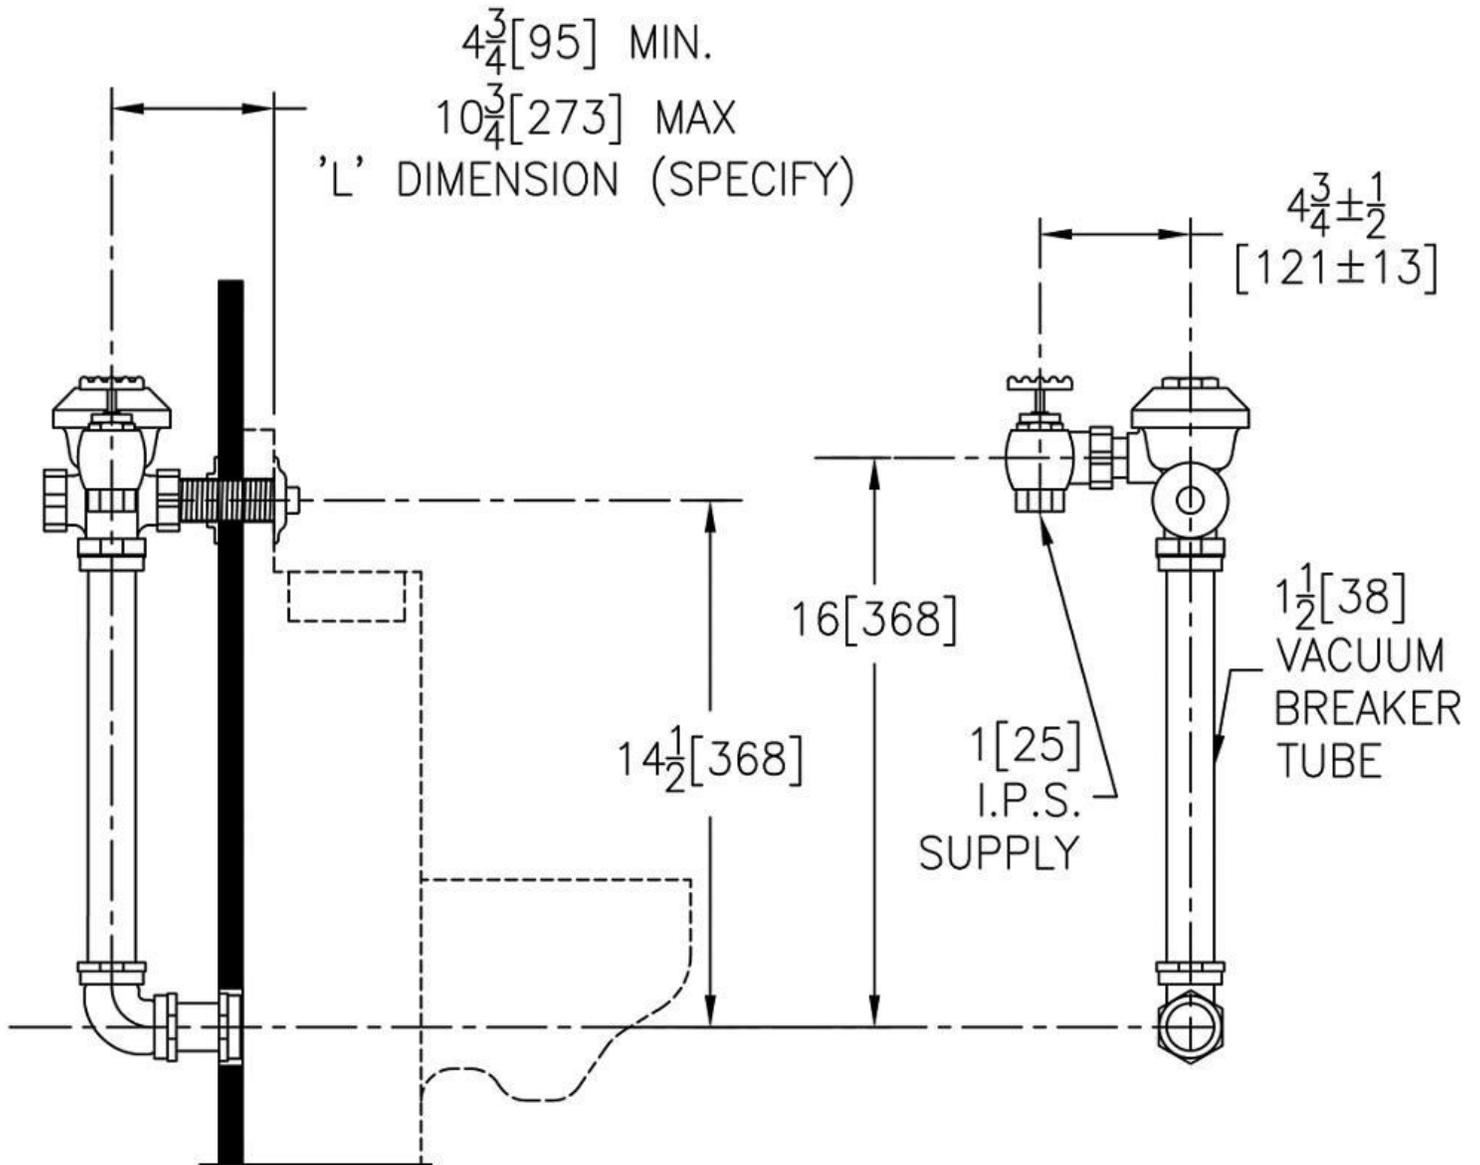
⚠WARNING: *Cancer and Reproductive Harm – www.P65warnings.ca.gov*
⚠ADVERTENCIA: *Cáncer y daño reproductivo – www.P65warnings.ca.gov*
⚠AVERTISSEMENT: Cancer *et effets néfastes sur la reproduction – www.P65warnings.ca.gov*

by Zurn Elkay Water Solutions
ZURN.COM
Patent zurn.com/patents
© 2026   Page 1

5900 Elwin Buchanan Drive, Sanford, NC 27330
US 1.800.997.3876 Sensor.Products@zurn.com
3544 Nashua Drive, Mississauga, Ontario L4V1L2
CANADA 1.877.892.5216 Sensor.Products@zurn.com

Z6603AV
Z6603AV_spec.pdf
REV 2/24/2026

$4\frac{3}{4}[95]$ MIN.
$10\frac{3}{4}[273]$ MAX
'L' DIMENSION (SPECIFY)

$4\frac{3}{4}\pm\frac{1}{2}$
$[121\pm13]$

$16[368]$

$14\frac{1}{2}[368]$

$1[25]$
I.P.S.
SUPPLY

$1\frac{1}{2}[38]$
VACUUM
BREAKER
TUBE

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

by Zurn Elkay Water Solutions
ZURN.COM
Patent zurn.com/patents
© 2026   Page 2

5900 Elwin Buchanan Drive, Sanford, NC 27330
US 1.800.997.3876 Sensor.Products@zurn.com
3544 Nashua Drive, Mississauga, Ontario L4V1L2
CANADA 1.877.892.5216 Sensor.Products@zurn.com

Z6603AV
Z6603AV_spec.pdf
REV 2/24/2026