




Z670

GROUND WATER CONTAINMENT DRAIN

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

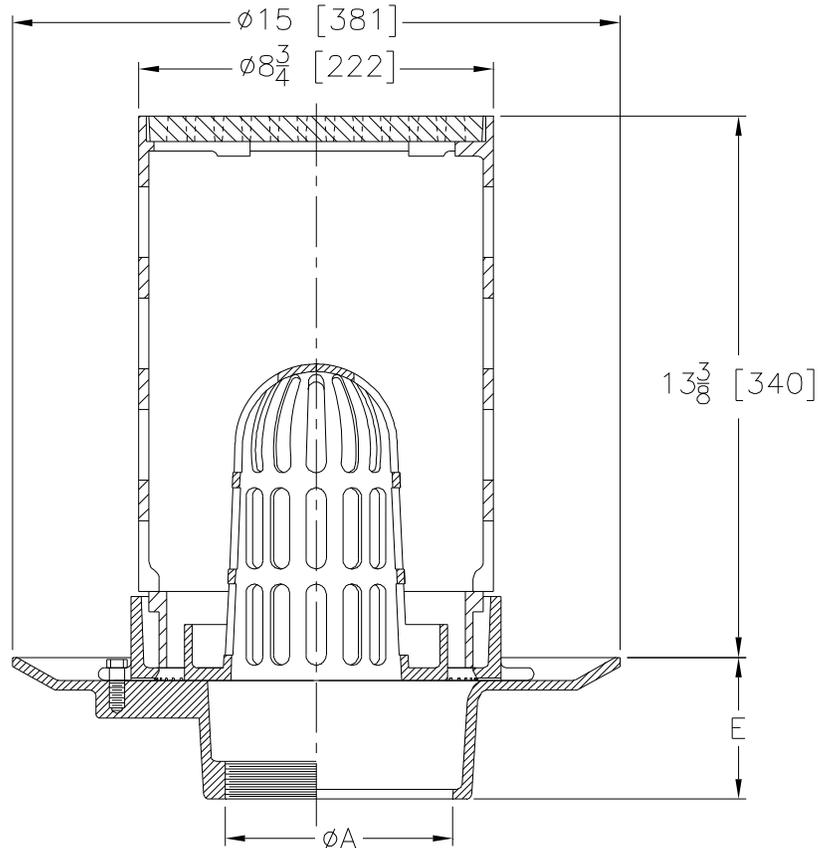

A Pipe Size	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
3, 4 [76, 102]	45 [20]	84 [542]
6 [152]		

ENGINEERING SPECIFICATION: ZURN Z670

9 [229] Diameter ground water containment drain, Dura-Coated cast iron body with bottom outlet, internal dome, seepage pan and combination membrane flashing clamp and frame, with perforated combination extension/ballast guard.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 3, 4, 6 [76, 102, 152]
- 3, 4, 6 [76, 102, 152]
- 3, 4, 6 [76, 102, 152]
- 3, 4, 6 [76, 102, 152]

(Specify size/type) **OUTLET**

- ___ IC Inside Caulk
- ___ IG Inside Gasket
- ___ IP Threaded
- ___ NH No-Hub

'E' BODY HT. DIM.

- 3-1/2 [89]
- 3-1/2 [89]
- 2-5/8 [67]
- 3-1/2 [89]

PREFICES

- ___ Z D.C.C.I. Body and Top*

SUFFIXES

- ___ -DG Duresist Grate
- ___ -F 14 [356] High Cast Iron Perforated Extension (Stackable)
- ___ -G Galvanized Cast Iron
- ___ -TS Top Secured With Slotted Screws
- ___ -VP Vandal-Proof Secured Top

REV. E	DATE: 10/21/11	C.N. NO. 122310
DWG. NO. 59253	PRODUCT NO. Z670	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED