




Z690

SPECIFICATION SHEET

**16 [406] DIAMETER OIL INTERCEPTING
DRAIN EXTRA-HEAVY-DUTY**

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

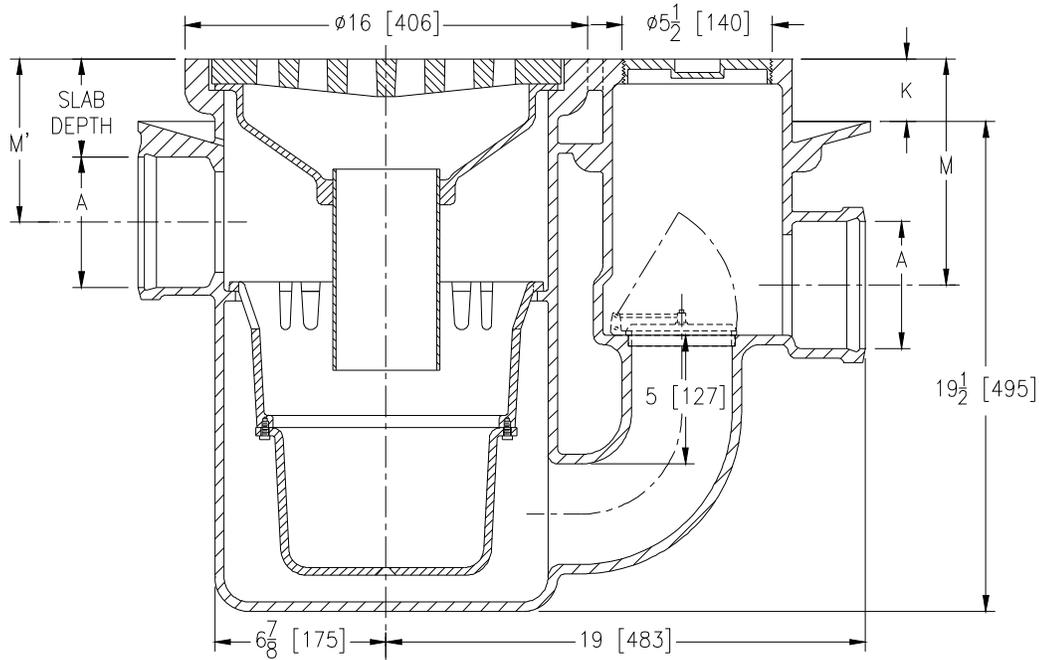

A Pipe Size	Dimensions In Inches					Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
	Slab Depth	K	M	M'	N		
3, 4 [76, 102]	4 [102]	2-1/2 [64]	9 [229]	6-1/2 [165]	6-3/4 [171]	384 [174]	30 [194]
4 [102]	6 [152]	4-1/2 [114]	11 [279]	8-1/2 [216]	8-3/4 [222]	390 [177]	
4 [102]	12 [305]	10-1/2 [267]	17 [432]	14-1/2 [368]	14-3/4 [375]	410 [186]	

ENGINEERING SPECIFICATION: ZURN Z690 16 [406] Diameter top oil intercepting drain, Dura-Coated cast iron body with integral double wall deep seal trap and side outlet, seepage pan and vent connection, integral gas seal cone and large capacity sediment bucket, bronze floor level cleanout plug and extra-duty cast iron loose slotted grate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

3, 4 [76, 102]

(Specify size/type) **OUTLET**

_____ HB Hub

BODY HT. DIM.

19-1/2 [495]

PREFIXES

- _____ Z Body and D.C.C.I. Top*
- _____ ZB Body with Polished Bronze Top (Add 3/16 [5] to 'K' Dim.)
- _____ ZN Body with Polished Nickel Bronze Top (Add 3/16 [5] to 'K' Dim.)

SUFFIXES

- _____ -A 2 [51] Auxiliary Vent Connection
- _____ -C Clamp Collar
- _____ -G Galvanized Cast Iron
- _____ -TS Top Secured with Slotted Screws
- _____ -V Backwater Valve
- _____ -VP Vandal-Proof Secured Top

REV. E	DATE: 11/8/10	C.N. NO. 120338
DWG. NO. 59258	PRODUCT NO. Z690	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED