



Model(s) Z7000-i5

Temp-Gard® Institutional Shower Head, 2.5 GPM

TAG

Architectural/Engineering Specification:

Large, self-cleaning brass chrome plated shower head, with bronze body institutional wall mount with hard chrome plated finish, maximum flow rate 2.5 GPM at 80 PSI, variable flow orifice feature to maintain constant flow rate, 1/2" NPT female threaded inlet, body width spray pattern adjusts from needle shower to heavy wash, 4 mounting screws provided, vandal resistant standard.

FLOW OPTIONS:

	-1.25	Water Saver Flow Control, 1.25 GPM
	-1.5	Water Saver Flow Control, 1.5 GPM
	-1.75	Water Saver Flow Control, 1.75 GPM
	-2.0	Water Saver Flow Control, 2.0 GPM

SUFFIX OPTIONS:

	-AP	Anchor Plate
	-BP	Base Plate




**Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.*

Architectural/Engineering Approval

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠ WARNING: Cancer and Reproductive Harm – www.P65warnings.ca.gov
⚠ ADVERTENCIA: Cáncer y daño reproductivo – www.P65warnings.ca.gov
⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov

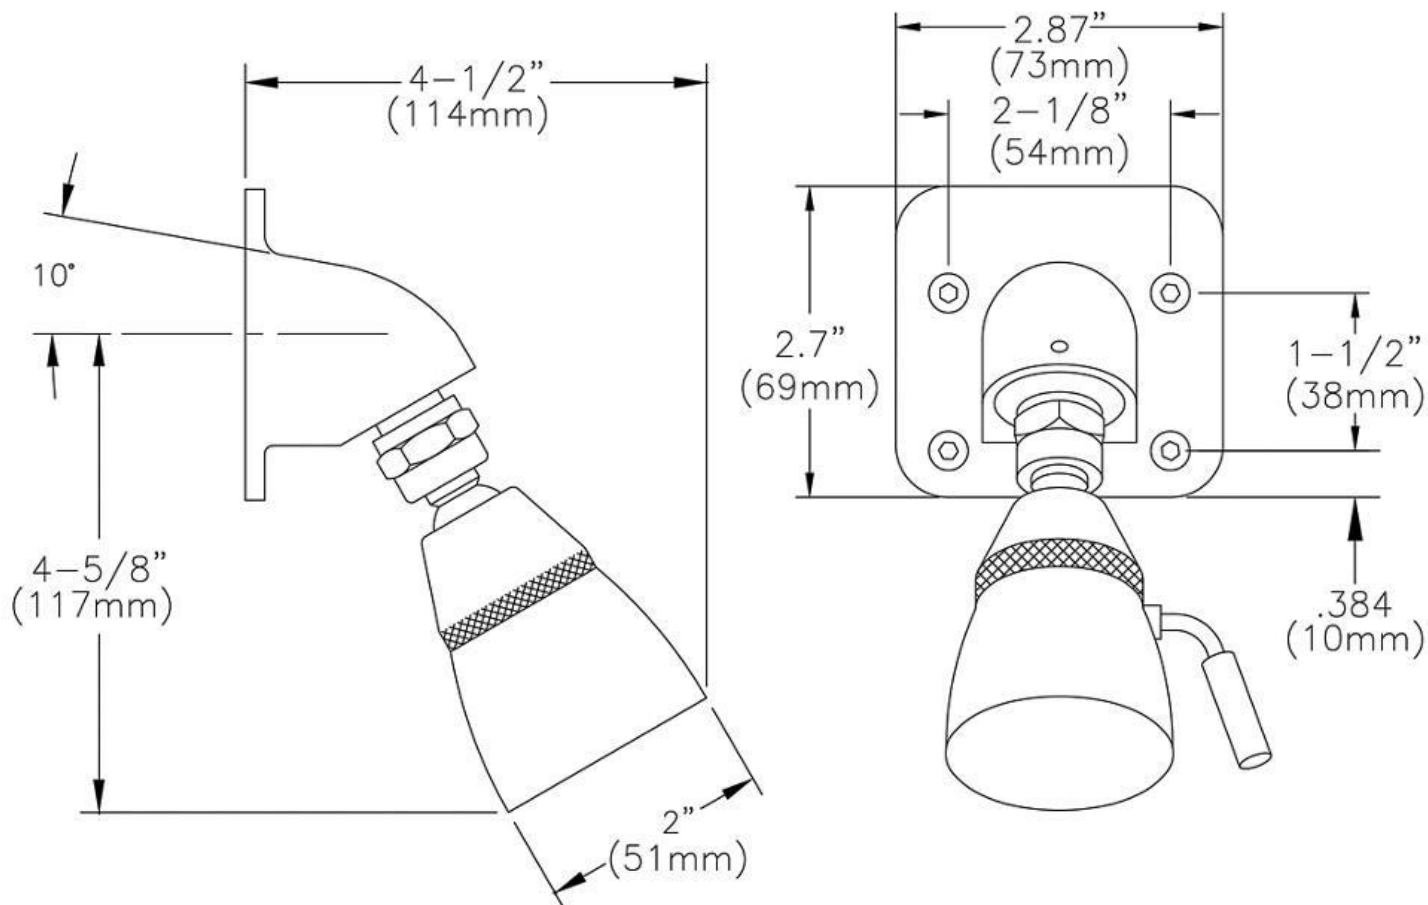

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠ WARNING: Cancer and Reproductive Harm – www.P65warnings.ca.gov
 ⚠ ADVERTENCIA: Cáncer y daño reproductivo – www.P65warnings.ca.gov
 ⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov