



Model(s) Z7000-S7

Temp-Gard® Shower Head, 2.2 GPM

TAG

Architectural/Engineering Specification:

Ball joint solid brass chrome plated shower head, maximum flow rate 2.2 GPM at 80 PSI, pressure compensating flow control, 1/2" NPT female threaded inlet, fixed body width spray pattern. Vandal proof resistance optional.

PRODUCT FEATURES:

- Solid brass chrome-plated shower head with ball joint connector
- Fixed body-width spray pattern




**Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.*

Architectural/Engineering Approval

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

▲WARNING: Cancer and Reproductive Harm – www.P65warnings.ca.gov
 ▲ADVERTENCIA: Cáncer y daño reproductivo – www.P65warnings.ca.gov
 ▲AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov

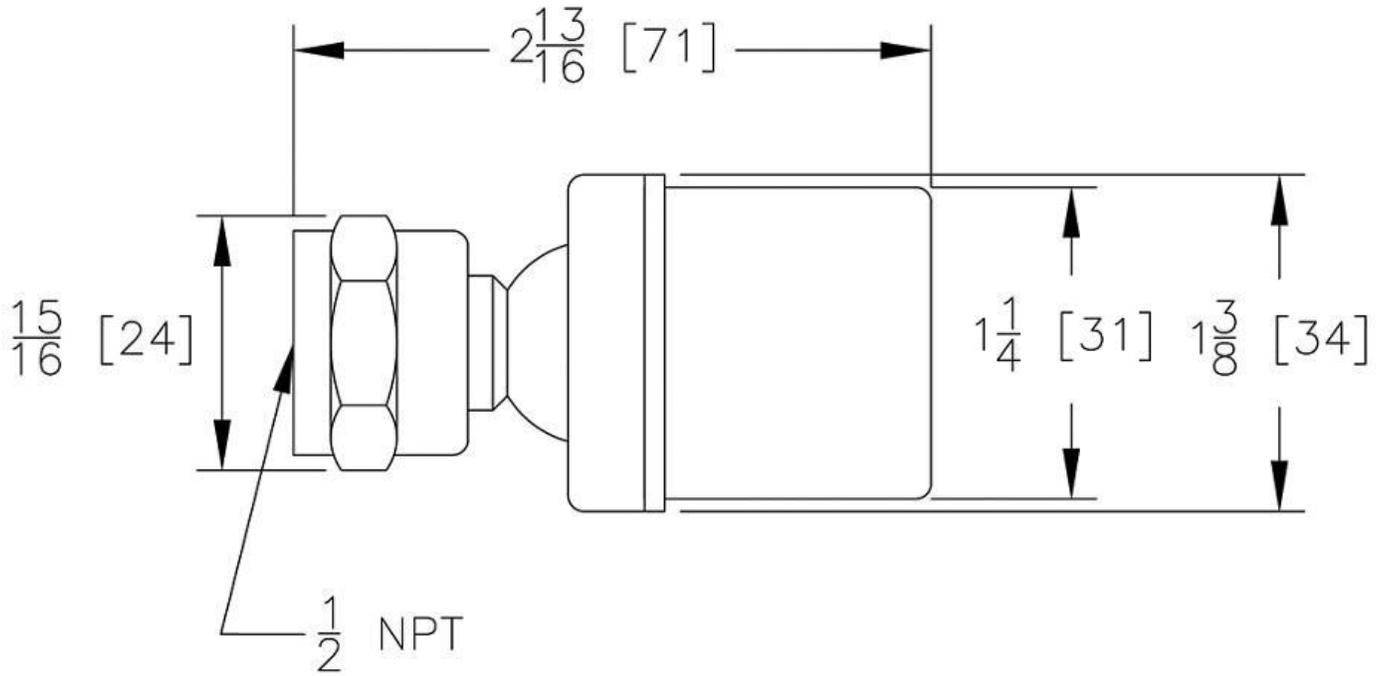

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠ WARNING: Cancer and Reproductive Harm – www.P65warnings.ca.gov
 ⚠ ADVERTENCIA: Cáncer y daño reproductivo – www.P65warnings.ca.gov
 ⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov