Architectural/Engineering Specification:

Polished chrome plated cast brass single control kitchen faucet with an integral 10" [245mm] cast swing spout, a ceramic disc cartridge and a temperature limit stop. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (Complying with ANSI A112.18.1 Standard for flow), a metal ADA compliant lever handle, stainless steel flex connection hoses and mounting hardware.
Zurn Lead Compliant* "XL" products are a line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with state laws and local codes that mandate lead content levels. Zurn "XL" products are manufactured with *not more than 0.25% lead content when used with respect to wetted surfaces of pipes and pipe fittings, plumbing fitting and fixtures: California Health & Safety Code § 116875; Vermont 9 VCA § 2470h.

PRODUCT FEATURES:

- Heavy-duty Quarter Turn Ceramic Disc Cartridge
- Chrome-plated Cast Brass Body
- Stainless Steel Flex Connection Hoses
- Integral 10" Cast Spout with Single Control Lever Handle

SUFFIX OPTIONS:

☐	-CP8	Chrome Plated 8" [203mm] Cover Plate
☐	-G	1-1/4" [32mm] Grid Strainer Drain
☐	-HS	Hose and Spray

AERATOR OPTIONS:

	Suffix	Flowrate GPM [L]	Vandal-Resistant	Pressure Compensating	Outlet Type
☐	-16M	1.0 GPM [3.8L]	x	x	Spray
☐	-17M	1.5 GPM [5.7L]	x	x	Aerator
☐	-18M	1.5 GPM [5.7L]	x	x	Laminar
☐	-22M	1.0 GPM [3.8L]	x		Laminar
☐	-2M	2.2 GPM [8.3L]	x		Aerator
☐	-3M	0.5 GPM [1.9L]	x		Spray
☐	-4M	2.2 GPM [8.3L]	x		Laminar
☐	-7M	1.0 GPM [3.8L]		x	Spray
☐	-25M	0.35 GPM [1.3L]	x	x	Spray
☐	-27M	0.5 GPM [1.9L]			Laminar
☐	-28M	0.5 GPM [1.9L]	x		Laminar

Product Compliance:
ADA
ASME A112.18.1/CSA B125.1
CEC
CSA B125.1
IPC
NSF 372

*Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.
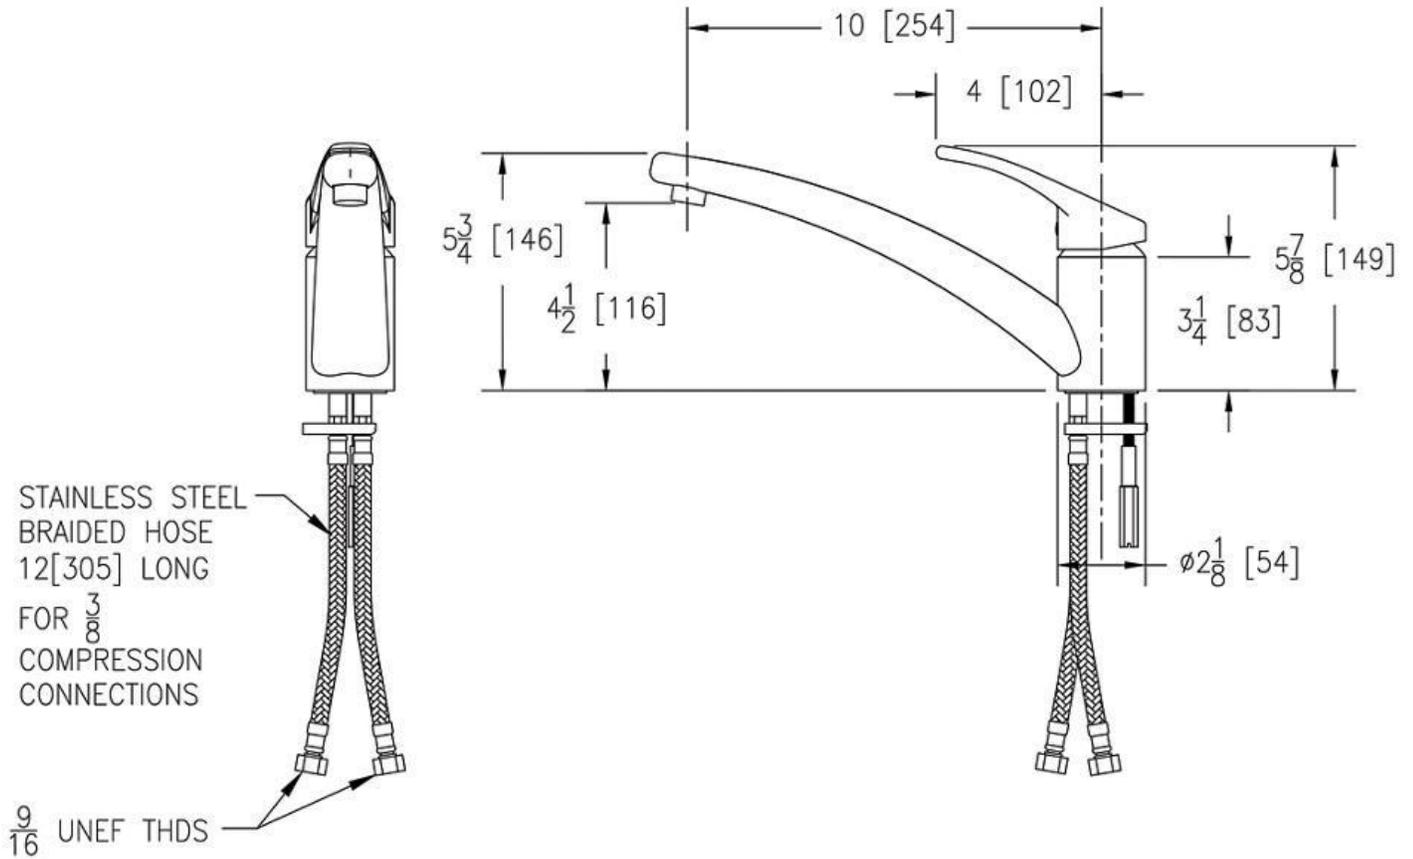
Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.

Installation Guide - CF1551.pdf

Architectural/Engineering Approval

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠WARNING: *Cancer and Reproductive Harm – www.P65warnings.ca.gov*
⚠ADVERTENCIA: *Cáncer y daño reproductivo – www.P65warnings.ca.gov*
⚠AVERTISSEMENT: Cancer *et effets néfastes sur la reproduction – www.P65warnings.ca.gov*

by Zurn Elkay Water Solutions
ZURN.COM
Patent zurn.com/patents
© 2026   Page 1

5900 Elwin Buchanan Drive, Sanford, NC 27330
US 1.855.ONE.ZURN Sensor.Products@zurn.com
3544 Nashua Drive, Mississauga, Ontario L4V1L2
CANADA 1.877.892.5216 Sensor.Products@zurn.com

Z82300-XL
Z82300-XL_spec.pdf
REV 2/24/2026

10 [254]

4 [102]

$5\frac{3}{4}$ [146]

$4\frac{1}{2}$ [116]

$5\frac{7}{8}$ [149]

$3\frac{1}{4}$ [83]

ø$2\frac{1}{8}$ [54]

STAINLESS STEEL BRAIDED HOSE 12[305] LONG FOR $\frac{3}{8}$ COMPRESSION CONNECTIONS

$\frac{9}{16}$ UNEF THDS

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.