Architectural/Engineering Specification:

Polished chrome-plated widespread faucet with adjustable centers from 6" to 20", a rigid or swing spout, slow-closing metering cartridges, and vandal-resistant ADA compliant color-coded handles. Easy adjustable cycle time, preset to 10 seconds. Unit is furnished with a standard waterconserving 1.0 GPM spray outlet, integral shank filters, mounting hardware, and 1/2" NPSM coupling nuts for standard lavatory risers. Requires less than 5 pounds force to activate per ANSI A117.1.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

PRODUCT FEATURES:

- Polymer Metering Cartridge Sleeve
- Chrome-plated cast brass widespread body
- Adjustable centers from 6" to 20"
- Color Coded Brass Metering Handle
- Adjustable Cycle Timing
- Note: By nature, warm/hot water causes 1 -2 seconds lower flow time than cold water
- Note: 0.35 GPM aerator typically maxes out around 10 second run time

SUFFIX OPTIONS:

☐	-G	1-1/4" [32mm] Grid Strainer Drain
☐	-IN	Institutional handle
☐	-P	1-1/4" [32mm] Pop-up Drain

AERATOR OPTIONS:

	Suffix	Flowrate GPM [L]	Vandal-Resistant	Pressure Compensating	Outlet Type
☐	-3F	0.5 GPM [1.9L]	x		Spray
☐	-7F	1.0 GPM [3.8L]		x	Spray
☐	-16F	1.0 GPM [3.8L]	x	x	Spray
☐	-22F	1.0 GPM [3.8L]	x		Laminar
☐	-25F	0.35 GPM [1.3L]	x	x	Spray
☐	-28F	0.5 GPM [1.9L]	x		Laminar

Product Compliance: ADA
ASME A112.18.1/CSA B125.1
CEC
CSA B125.1

*Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

*Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.
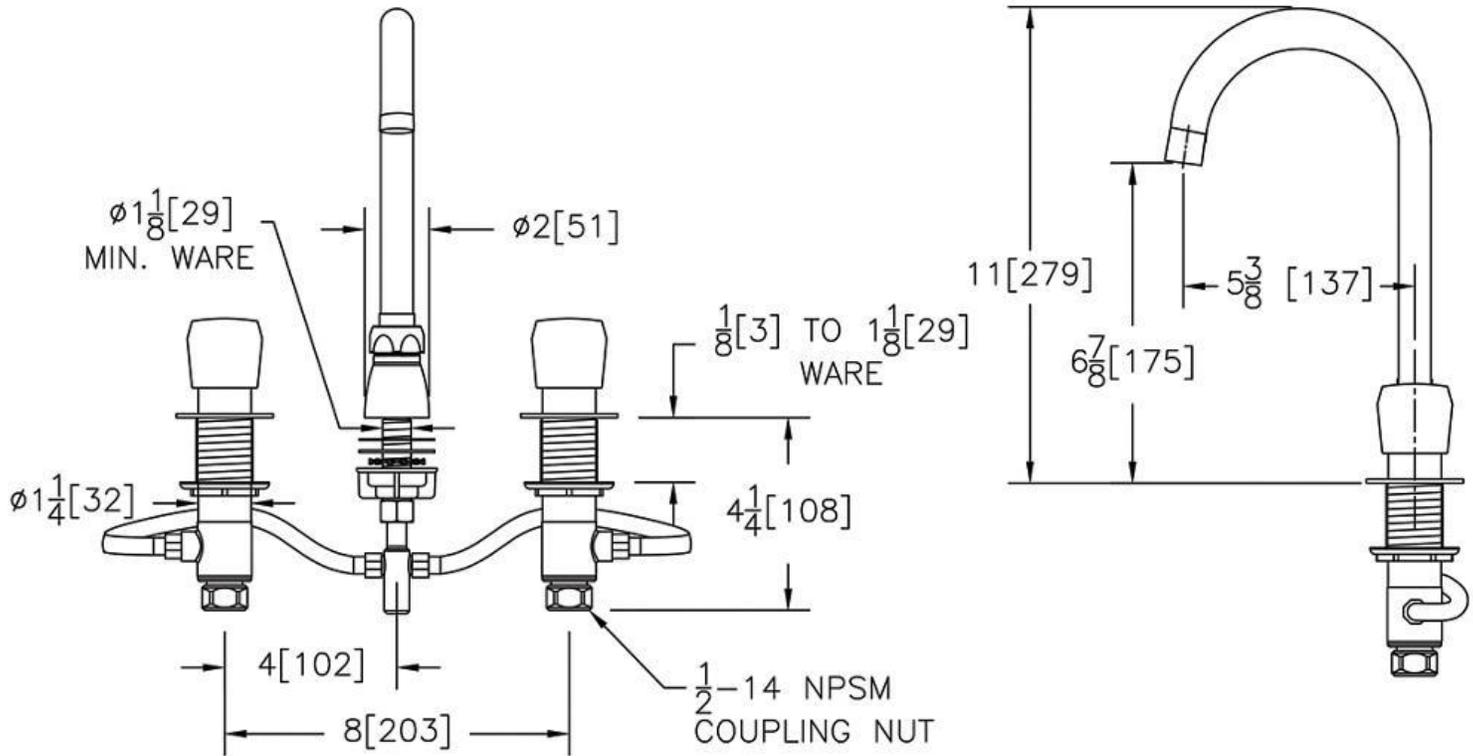
Installation Guide - CF1198.pdf

Architectural/Engineering Approval

⚠WARNING: *Cancer and Reproductive Harm – www.P65warnings.ca.gov*
⚠ADVERTENCIA: *Cáncer y daño reproductivo – www.P65warnings.ca.gov*
⚠AVERTISSEMENT: Cancer *et effets néfastes sur la reproduction – www.P65warnings.ca.gov*

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

by Zurn Elkay Water Solutions
ZURN.COM
Patent zurn.com/patents
© 2026   Page 1

5900 Elwin Buchanan Drive, Sanford, NC 27330
US 1.855.ONE.ZURN Sensor.Products@zurn.com
3544 Nashua Drive, Mississauga, Ontario L4V1L2
CANADA 1.877.892.5216 Sensor.Products@zurn.com

Z867B0-XL
Z867B0-XL_spec.pdf
REV 3/3/2026

Ø1$\frac{1}{8}$[29] MIN. WARE

Ø2[51]

$\frac{1}{8}$[3] TO 1$\frac{1}{8}$[29] WARE

Ø1$\frac{1}{4}$[32]

4$\frac{1}{4}$[108]

4[102]

8[203]

$\frac{1}{2}$-14 NPSM COUPLING NUT

11[279]

5$\frac{3}{8}$ [137]

6$\frac{7}{8}$[175]

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠WARNING: *Cancer and Reproductive Harm – www.P65warnings.ca.gov*
⚠ADVERTENCIA: *Cáncer y daño reproductivo – www.P65warnings.ca.gov*
⚠AVERTISSEMENT: Cancer *et effets néfastes sur la reproduction – www.P65warnings.ca.gov*