ZURN®

Architectural/Engineering Specification:

Exposed, quiet diaphragm-type, chrome plated, flushometer valve with a polished exterior. Complete with a chloramine resistant, dual seal diaphragm with a clog resistant by-pass. The valve incorporates a 6 VDC motorized actuator, an integral infrared convergence-type proximity sensor and a manual push-button override into an all metal, polished chrome plated housing. The valve is complete with high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon guard protection. The AquaFlush® Plus is also furnished with a sweat solder kit, vandal resistant stop cap, and cast wall flange with set screw. Internal seals are made of chloramine resistant materials.

VALVE HEIGHT OPTIONS:

		Vacuum Tube Length	Rough-in Height "A"
☐	Standard	8-1/2" [216"]	11-1/2" [292]
☐	-1	13" [330]	16" [406]
☐	-2	21" [533]	24" [610]
☐	-3	24" [610]	27" [686]

FLOW OPTIONS:

		Flush Volume	*WaterSense Labeled
☐	-ULF	0.125 gpf	x
☐	-EWS	0.5 gpf	x
☐	-WS1	1.0 gpf	
☐	-Standard	1.5 gpf	

SUFFIX OPTIONS:

☐	-FM12	Floor Mount 12" Rough In
☐	-MOB	Manual Over-ride Button (Front of Body)
☐	-YJ	Split Ring Pipe Support
☐	-YK	Solid Ring Pipe Support

Product Compliance: ADA

*Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.
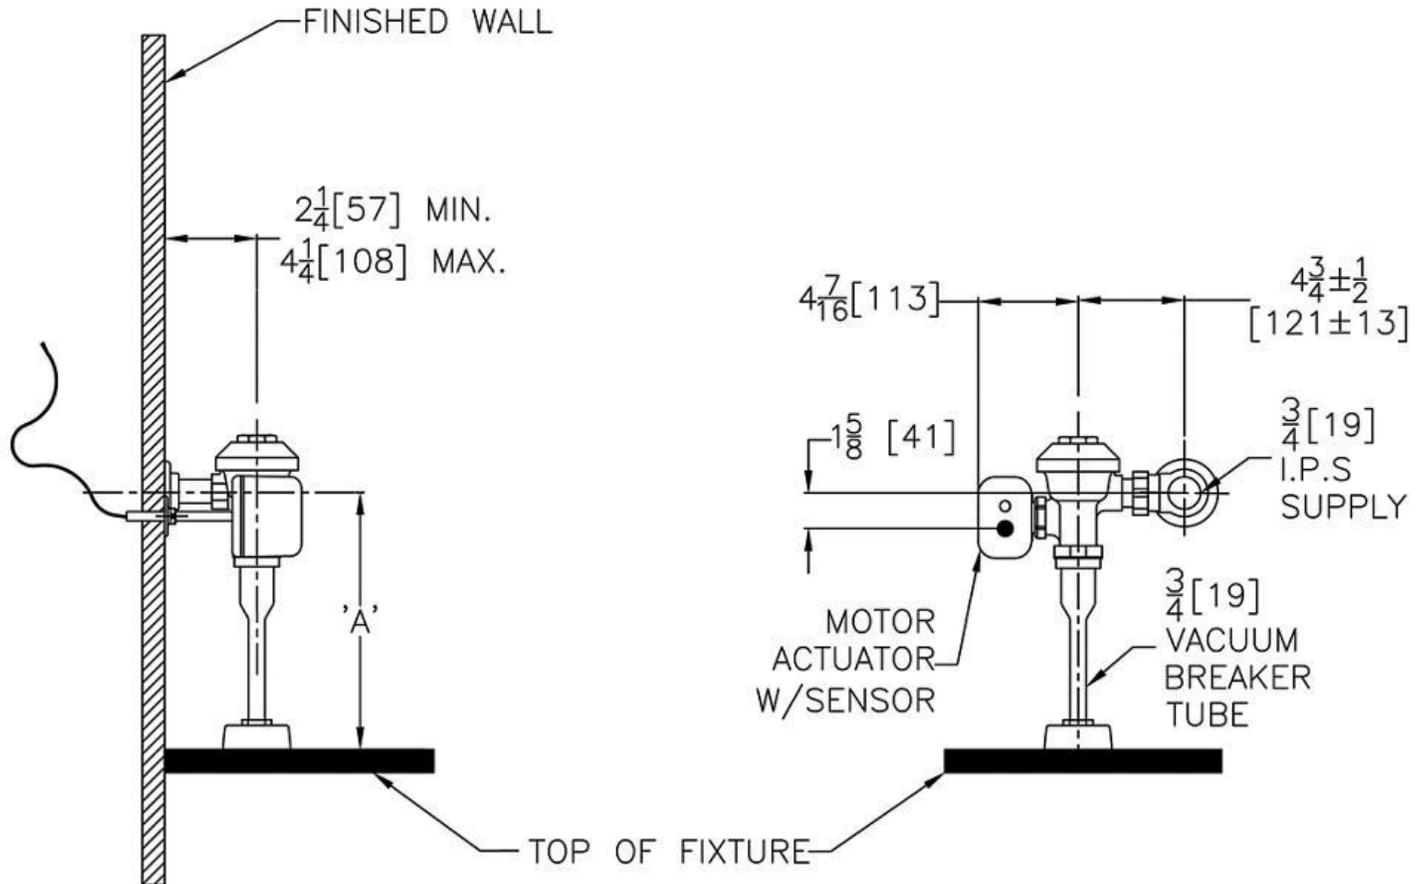
*Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.

Installation Guide - Fv343.pdf

Architectural/Engineering Approval

⚠WARNING: *Cancer and Reproductive Harm –* www.P65warnings.ca.gov
⚠ADVERTENCIA: *Cáncer y daño reproductivo –* www.P65warnings.ca.gov
⚠AVERTISSEMENT: Cancer *et effets néfastes sur la reproduction –* www.P65warnings.ca.gov

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

FINISHED WALL

$2\frac{1}{4}$[57] MIN.
$4\frac{1}{4}$[108] MAX.

'A'

TOP OF FIXTURE

$4\frac{7}{16}$[113]

$4\frac{3}{4}\pm\frac{1}{2}$ [121±13]

$1\frac{5}{8}$ [41]

$\frac{3}{4}$[19] I.P.S SUPPLY

$\frac{3}{4}$[19] VACUUM BREAKER TUBE

MOTOR ACTUATOR W/SENSOR

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠WARNING: *Cancer and Reproductive Harm – www.P65warnings.ca.gov*
⚠ADVERTENCIA: *Cáncer y daño reproductivo – www.P65warnings.ca.gov*
⚠AVERTISSEMENT: Cancer *et effets néfastes sur la reproduction – www.P65warnings.ca.gov*