



## Model(s) ZTR6203

### ZTR Sensor Flush Valve

TAG \_\_\_\_\_

#### Architectural/Engineering Specification:

Exposed, quiet piston-type, chrome plated flushometer valve with a polished exterior. Complete with chloramine resistant, filtered piston kit. The valve incorporates a 6VDC solenoid actuator, a battery powered automatic sensor with manual override push button, and robust vandal resistant metal cover with 10 degree angled sensor.

#### PRODUCT FEATURES:

- Filtered Piston Kit Chloramine resistant
- Control Stop Internal siphon-guard protection Vandal resistant stop cap Sweat solder kit Cast wall flange with set screw
- High back pressure Vacuum Breaker with one piece hex coupling nut
- Chloramine resistant Internal seals
- Adjustable tailpiece
- Spud coupling and flange for top spud connection

#### VALVE HEIGHT OPTIONS:

|          | Vacuum Tube Length | Rough-in Height "A" |
|----------|--------------------|---------------------|
| Standard | 8-1/2" [216"]      | 11-1/2" [292]       |
| -1       | 13" [330]          | 16" [406]           |

#### FLOW OPTIONS:

|      | Flush Volume | *WaterSense Labeled |
|------|--------------|---------------------|
| -ULF | 0.125 gpf    | x                   |
| -QRT | 0.25 gpf     | x                   |
| -EWS | 0.5 gpf      | x                   |
| -WS1 | 1.0 gpf      |                     |

#### SUFFIX OPTIONS:

|     |                         |
|-----|-------------------------|
| -YJ | Split Ring Pipe Support |
| -YK | Solid Ring Pipe Support |



#### Product Compliance:

ADA  
ASSE 1037/ASME A112.1037/CSA B125.37  
ASSE 1037  
CSA B125.37  
IPC  
WaterSense

\*Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.



\*This product should be used with a WaterSense labeled counterpart with a compatible flow volume to ensure that the entire system meets the requirements for water efficiency and performance.


*\*Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.*

[Installation Guide - FV541.pdf](#)

Architectural/Engineering Approval

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠ WARNING: Cancer and Reproductive Harm – [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)  
⚠ ADVERTENCIA: Cáncer y daño reproductivo – [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)  
⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)

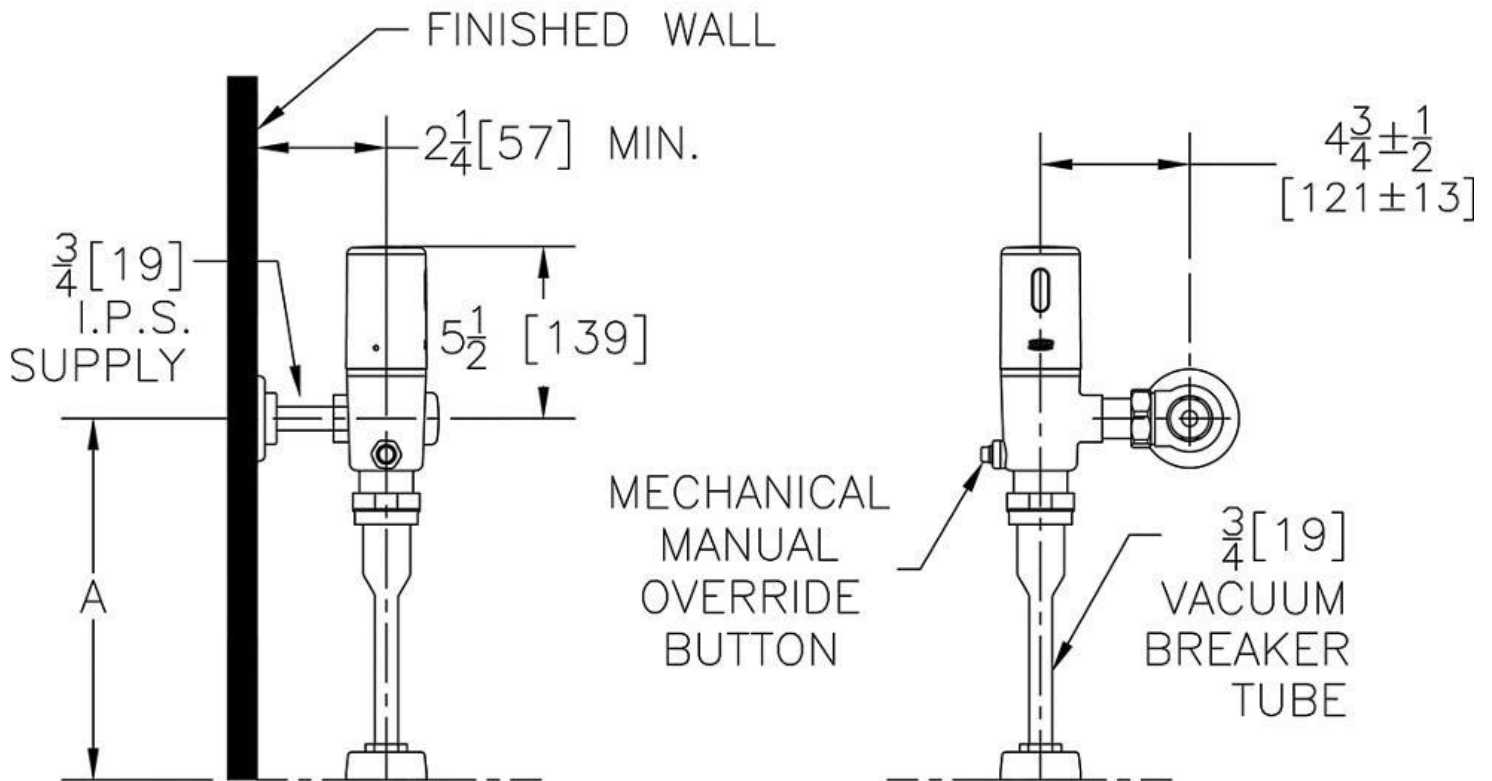

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.