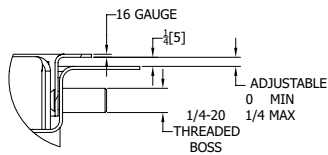

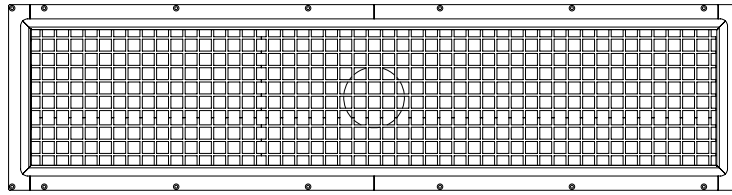
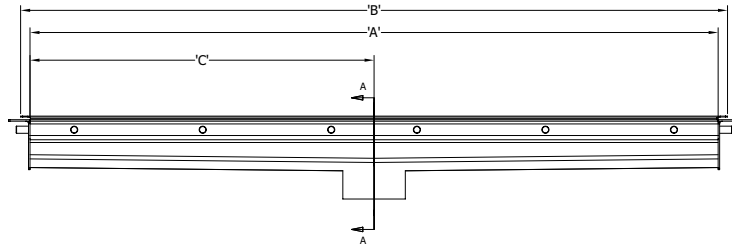


**Z896****11 [279] WIDE REVEAL TRENCH DRAIN SYSTEM WITH
RESILIENT FLOORING ADJUSTABLE CLAMPING FLANGE**

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

**DETAIL F****SECTION A-A****ENGINEERING SPECIFICATION: Zurn Z896**

Channels are 48" [1219mm] long, 11" [279mm] wide reveal and have a 8" [203mm] throat. Channel sections are made of 16 ga. fabricated stainless steel conforming to ASTM A-240 (type 304). Channels have 16 ga. surface clamps for resilient flooring and 1/4-20 threaded inserts to mechanically attach the surface clamp to the drain body. Channels weigh less than 5.58 lbs. [2.53 kg] per linear foot, have a smooth, 'V' bottom self flushing profile with a Manning's coefficient of .009 and 1.04% built in slope. Channels come complete with 4" [102mm] No-Hub (Sch. 10) bottom outlet and anchoring flange. Shall be provided with standard loose set GG grate. Zurn 9-5/16" [236] wide reveal fiberglass grate is rated class A per the DIN EN 1433 top load classification. Channels shall be produced in the U.S.A.

Standard size units are shown below

Product Designation		Dimension In Inches [mm]				
		'A'	'B' (Dim A+1-1/2)	'C'***	'D' (3-1/2 Min.)	'E' (18 Max.)
_____	-24	24 [610]	25-1/2 [648]	12 [305]	3-1/2 [89]	3-5/8 [92]
_____	-30	30 [762]	31-1/2 [800]	15 [381]	3-1/2 [89]	3-21/32[93]
_____	-36	36 [914]	37-1/2 [952]	18 [458]	3-1/2 [89]	3-11/16[94]
_____	-42	42 [1067]	43-1/2 [1105]	21 [533]	3-1/2 [89]	3-23/32[95]
_____	-48*	48 [1219]	49-1/2 [1257]	24 [610]	3-1/2 [89]	3-3/4 [95]
_____	-54	54 [1372]	55-1/2 [1410]	27 [686]	3-1/2 [89]	3-25/32[96]
_____	-60	60 [1524]	61-1/2 [1562]	30 [762]	3-1/2 [89]	3-13/16[97]

PREFIX OPTIONS (Check/specify appropriate options)

_____ Z Type 304 (CF8) Stainless Steel*
_____ ZM Type 316 (CF8M) Stainless Steel

SUFFIX OPTIONS (Check/specify appropriate options)**Outlet Adapters Add/Each**

_____ U2 2 [51] No-Hub Bottom Outlet (Sch. 10)
_____ U3 3 [76] No-Hub Bottom Outlet (Sch. 10)
_____ U4 4 [102] No-Hub Bottom Outlet (Sch. 10)*

* Regularly furnished unless otherwise specified

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Water, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Water, LLC
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Grate Options (Load Classifications are per DIN EN1433)

_____ -SQ Stainless Steel Square - Class A
_____ -GG Fiberglass Grate - Class A* (48" ONLY)

Miscellaneous Options

_____ -DB Bottom Drop in Basket

Rev. A

Date: 06/22/26

C.N. No. 147972

Patent zurn.com/patents

Prod. | Dwg. No.Z896

Page 1 of 1